


WOODWORKS® ACGI Allegro™ System

Series 3



Allegro™ Series 3 (AL3) provides a pre-engineered, pre-finished curved wood ceiling that easily suspends from a Unistrut® framing system. They are available in concave, convex or serpentine surfaces to meet both the acoustic and aesthetic requirements of the project. Panels suspend with a simple hanger system that provides security and accessibility. The panels are typically grouped together to form ceiling clouds. Allegro panels can also attach to walls.

Allegro Series 3 (AL3) panels offer a number of options to meet acoustical requirements. The panel thickness can be increased, and the weight can be increased in upwards to 9 lbs/sq. ft. AL3 is a composite panel with a typical panel thickness of 4-1/2". The panel can be filled with acoustical material or the panel can be designed with multiple layers of materials to increase its mass.

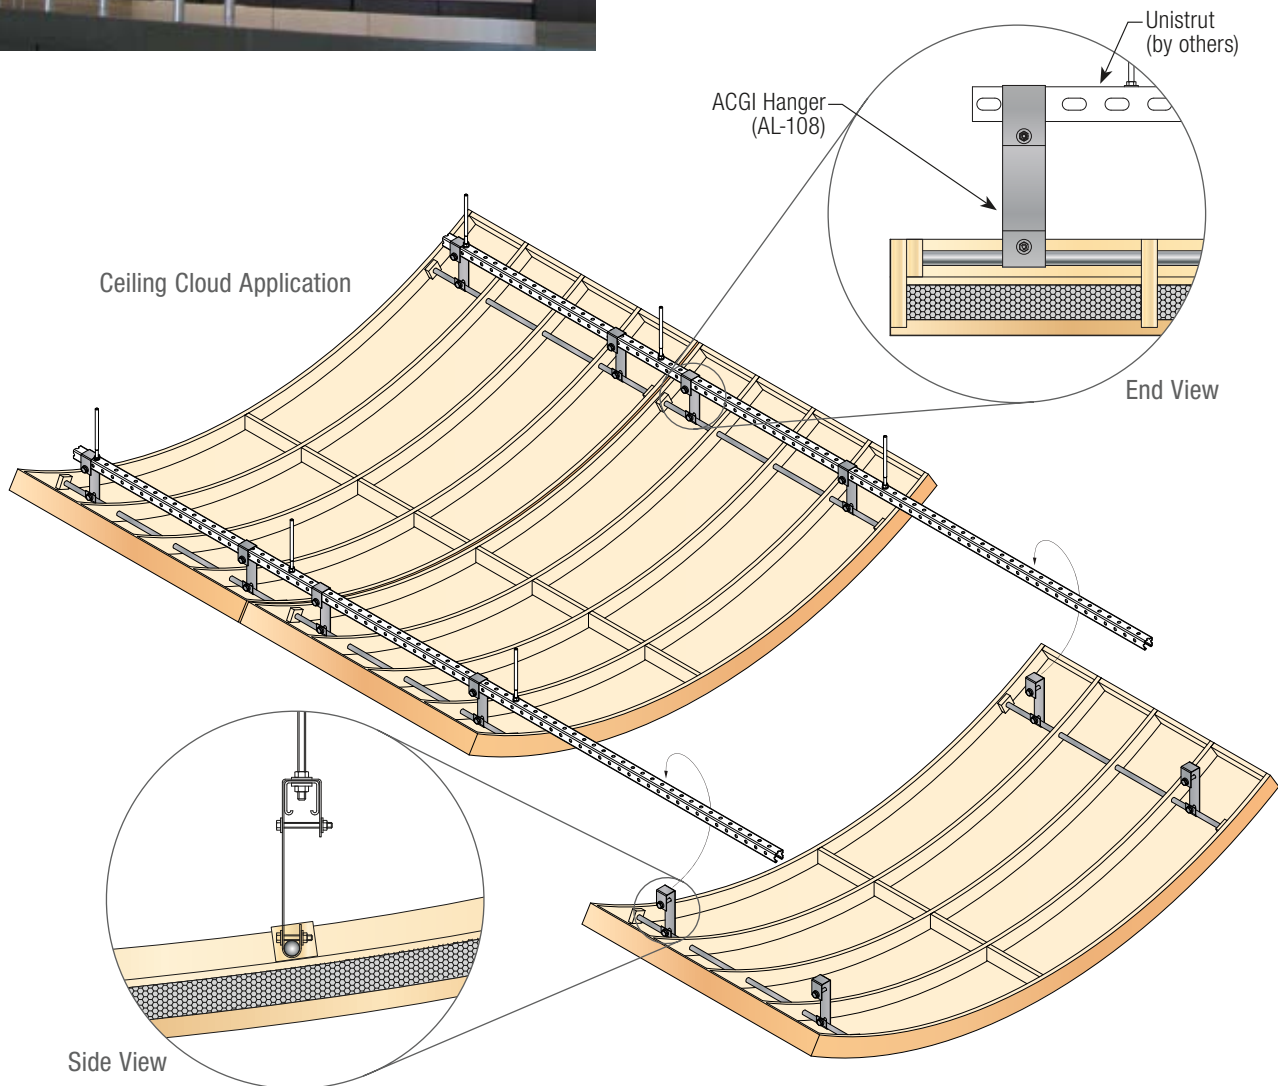


| Allegro Series 3 – Specification Information | | | | | |
|--|-------------------------|----------|--------------------------|-------------------|------------------------|
| Product No. | Encapsulated Insulation | Width | Arc Length (vener limit) | Typical Thickness | Typical Panel Weight |
| AL3-####-### | Optional | Up to 5' | Up to 10' | 4-1/2" | 4-1/2 lbs/sq. ft. min. |

How To Spec It...

Series | Panel Thickness
AL3-4896-450
 Width | Arc Length

What It Means...Allegro Series 3
 48" x 96" panel with 4-1/2" thickness.

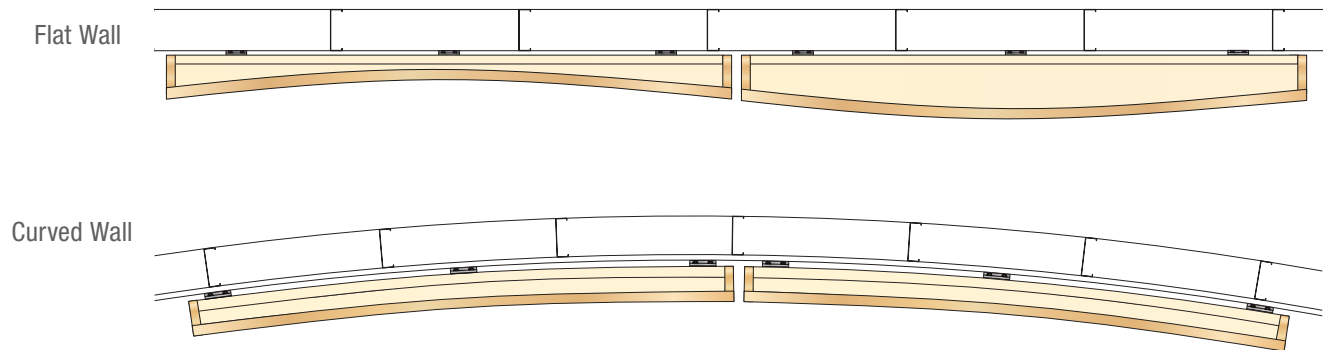

ACOUSTICS

NRC up to 0.10

LEED® CREDIT

Depending upon product it may contribute to LEED credits. Contact us for more information.

SPECIES + STAINS

Allegro™ panels are available in a large variety of wood veneers to meet design requirements. Allegro panels can be finished in any of our standard finish options or custom finishes. Please see Wood Species + Stain Catalog. Contact us for more information.

FIRE RATING

Solid Wood – Class C: ASTM E84 surface burning characteristics. Class B available with fire rated treatment.

Veneer Wood (Non-Perforated) – Class A: ASTM E84 surface burning characteristics.

DELIVERY, STORAGE & HANDLING (FOR INTERIOR APPLICATION ONLY)

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors, and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

Details at armstrongceilings.com/warranty.