

ALTITUDES® Torsion Spring
 Custom Concealed Ceiling System
 smooth texture



Altitudes® Torsion Spring In White



plus capabilities
 to do more

armstrongceilings.com/capabilities
 See more photos at:
armstrongceilings.com/photogallery


Monolithic ceiling system with large, sag-resistant, custom-size panels.

KEY SELECTION ATTRIBUTES

- Easily installs with standard Prelude® 15/16" suspension system
- Monolithic look with sag-resistant, large size panels
- Sizes up to 48" x 96" with or without upturns
- Shaped/curved panels available*
- Excellent acoustical performance – NRC 0.90
- Wide variety of color options available
- Mold- and mildew-resistant
- Smooth, clean, durable finish
- Downward accessible with tool
- Energy-saving high light-reflective finish (White)
- Non-directional visual
- Light reflectance up to 0.95

* Two opposite sides of panel must be straight

COLORS Due to printing limitations, shade may vary from actual product.



DETAILS



ALTITUDES® Torsion Spring Custom Concealed Ceiling System smooth texture

LEED® WELL™ LBC

UP TO **71% RECYCLED CONTENT**


energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

Calculate sustainability with Green Genie®
armstrongceilings.com/greengenie

LOCATION DEPENDENT

INSTALLATION DETAILS

\$\$\$\$

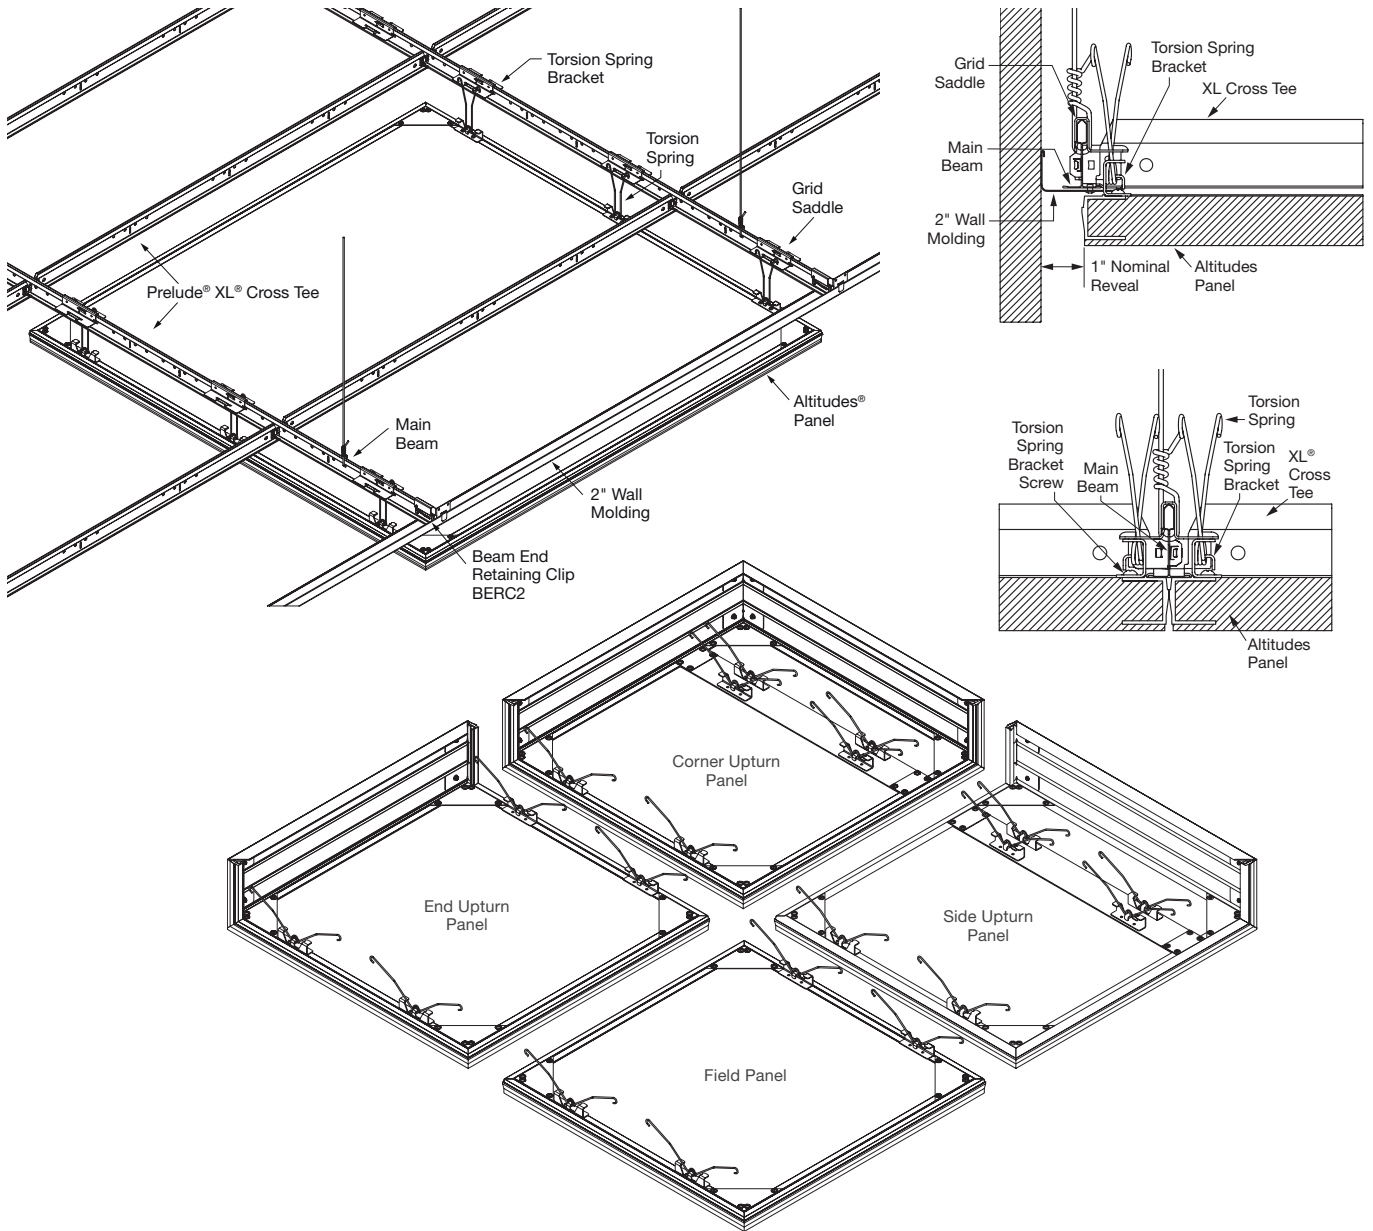

PHYSICAL DATA

Material
8 pc fiberglass and woven fiberglass scrim

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: Flame Spread Index of 25 or less.
Smoke Developed Index of 50 or less when tested in accordance with ASTM E84 (painted, face only).
CAN/ULC S102 surface burning characteristics.
Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (painted, face only).

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Recycled Content
Up to 35% recycled content.

Design Consideration
Shape panels are available, however, the panel must have two straight sides opposite each other. Other sides may be curved.

Installation Considerations
Clean, white gloves should be worn when installing panels to keep them free from dust or soiling. This system requires approximately 4" of clearance above the suspension system to accommodate the torsion springs.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Seismic Restraint
System has been designed, tested, and approved. See full installation instructions for seismic requirements.

Warranty
Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1.25 lbs/SF; Bulk crated

TechLine / 1 877 276-7876
armstrongceilings.com/altitudes
BPCS-4786-521

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; UL and UL Certified are trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2023 AWI Licensing LLC

Armstrong®
World Industries



FIBERGLASS – Custom