

CIRRUS® Profiles
 Chamfered, Beveled & Classic Step™
 Tegular
 medium texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Cirrus® Profiles - Classic Step™ panels with Suprafine® XL® 9/16" suspension system

Medium texture panels, with a variety of dimensional edge details; Offer both Sustain® and Total Acoustics® panel performance.

KEY SELECTION ATTRIBUTES


- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels:
 NRC + CAC = Total Acoustics performance
- Cirrus® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Classic edge details on refined Cirrus texture
- High quality factory-finished edge detail
- Ideal combination of sound absorption and blocking
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 91%

COLOR



White
 (WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

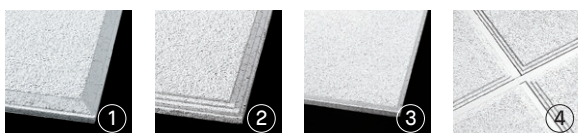

1. Cirrus® Chamfered
2. Cirrus® Classic Step
3. Cirrus® Beveled Tegular
4. Cirrus® Classic Step with Suprafine® 9/16" suspension system

CIRRUS® Profiles

Chamfered, Beveled & Classic Step™

Tegular

medium texture



Declare.



GREENGUARD Gold Certified
(details below)

LEED® WELL | LBC

UP TO **77%** RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/repurposed producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie®
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$


armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect	Bio-Block	Humi-Guard+	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
CIRRUS® Profiles – Chamfered* 15/16" Tegular	17	628	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	*	*	Std	*	*	*
9/16" Tegular	30	557	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	*	*	Std	*	*	*
CIRRUS® Profiles – Beveled 9/16" Tegular	29	590	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	Std	*	Std	*	*	10-Yr
CIRRUS® Profiles – Classic Step™ 15/16" Tegular	19	626	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	Std	*	Std	*	*	10-Yr
	18	591	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	*	*	Std	*	*	*
9/16" Tegular	31	591	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	*	*	Std	*	*	*
	32	585	24 x 24 x 3/4"	0.65	35 GOOD	Class A	0.85	*	Std	*	Std	*	*	10-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

GOOD (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

* Ceiling design copyrighted by AWI Licensing LLC.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
557, 591, 628 – Type III, Form 1, Pattern E I
585, 590, 626 – Type III, Form 1, Pattern E I K
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes items 585, 590, 626.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
590, 591 – 1.06 lbs/SF; 48 SF/ctn
557, 585, 626, 628 – 1.17 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
628M, 557M, 590M, 591M, 626M, and 585M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.