

CLEAN ROOM™

15/16" and 1-1/2" Exposed Tee Suspension System
aluminum



SUSTAIN™
High Performance
Sustainable
Ceiling Systems



Clean Room suspension system

This suspension system with integral gasket is designed specifically for clean rooms, food processing areas, and data centers.

KEY SELECTION ATTRIBUTES

- Suitable for use in Class 5 (Class 100 clean rooms as defined by ISO Standard 14644-1 (Federal Standard 209E) when used with Clean Room™ FL, Clean Room VL, Ultima® Health Zone™, and Optima® Health Zone™
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Seismic Rx® Suspension System; ICC-ES approach to installations (ESR-1308)
- Integral gasket for better seal between panel and grid
- Integral main beam splice for easy connections and module control
- XL® staked-on end detail
- Rotary-stitched for additional torsion strength
- Clean Room 15/16" and 1-1/2" is part of the Sustain™ portfolio and meets the most stringent industry sustainability compliance standards today
- 10-year limited warranty; 30-year with HumiGuard® Plus

TYPICAL APPLICATIONS

- Laboratories / Clean Rooms
- Pharmaceutical facilities
- Automotive and aerospace
- Computer rooms
- Hospitals
- Food processing facilities
- High-tech manufacturing
- Data Centers
- MRI suites

COLOR



VISUAL SELECTION

Item No.	Description	Rout Spacing	Dimensions (Inches)	HANGER SPACING* LBS./LFT			PERFORMANCE					PACKAGING		
				2 Ft.	4 Ft.	5 Ft.	Fire Guard™	Seismic Category DEF	CleanAssure™ Disinfectable Grid	Fog	Spray	Wipe	Pieces/ Carton	LFT/ Carton
CLEAN ROOM Co-Extruded Aluminum (Gasketed) 15/16"	EA7900	12" ID Main Beam	12" O.C.	144 × 15/16 × 2"	N/A	14.1	N/A	N/A	*	*	*	20	240	
	EA7940	4' Cross Tee	12" O.C.	48 × 15/16 × 2"	N/A	12.65	N/A	N/A	*	*	*	60	240	
	EA7920	2' Cross Tee		24 × 15/16 × 2"	41.9	N/A	N/A	N/A	*	*	*	60	120	
	EA7812**	12' Hemmed Angle Molding		144 × 15/16 × 15/16"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	30	360	
Other Sizes	Main beams L: 36" - 144" / Cross tees L: 24" - 144" / Rout spacing 6" from ends, 12" thereafter											Varies	Varies	
CLEAN ROOM Co-Extruded Aluminum (Gasketed) 1-1/2"	EA79015	12" HD Main Beam	12" O.C.	144 × 1-1/2 × 2"	N/A	16.7	8.4	N/A	*	*	*	*	12	144
	EA79415	4' Cross Tee	12" O.C.	48 × 1-1/2 × 2"	N/A	17.66	N/A	N/A	N/A	*	*	*	36	144
	EA79215	2' Cross Tee		24 × 1-1/2 × 2"	60.55	N/A	N/A	N/A	N/A	*	*	*	36	72

* Simple Span
** EA7812 to be used with both 15/16" and 1-1/2"

Dots represent high level of performance.


ACCESSORIES

BERC2 – 2" Beam End Retaining Clip – Allows you to create a code-compliant Seismic D, E, F ceiling installation while eliminating the need to use 2" wall molding or spreader bars.

ALBERC2 (aluminum) – 200 pcs


FZBERC2 (Steel) – 200 pcs
FZBERC2 (Steel) – 50 pcs

ALBERC2 (Aluminum) – 200 pcs
FZALBERC2 (Aluminum) – 50 pcs




CHDC – Clear Hold Down Clip – Attaches to top bulb of the suspension system to hold 1/16" to 5/8" lay-in panel in place; helps to prevent ceiling panel fluttering at entryways.

CHDC – 50 pcs
FZCHDC – 50 pcs



BHDC – Border Hold Down Clip – Attaches to Angle Molding to hold down perimeter panels

BHDC – 100 pcs



CLEAN ROOM™

15/16" and 1-1/2" Exposed Tee Suspension System
aluminum








LEED® WELL™ LBC

UP TO **50%** RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/recycled content
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

WELL Building Standard™ (WELL) Living Building Challenge® (LBC)

MAXIMUM FIXTURE WEIGHT

Item No.	CONFIGURATION		FIXTURE*		PLANNING MODULE		HANGER SPACING		MAXIMUM WEIGHT	
	A	B	A	B	A	B	A	B	A	B
Main Beam to Main Beam EA79015			24" x 48"	N/A	48" x 48"	N/A	48"	N/A	100.0 lbs.	N/A
			24" x 48"	12" x 48"	48" x 48"	48" x 48"	48"	48"	70.0 lbs.	100.0 lbs.
			12" x 48"	N/A	48" x 48"	N/A	48"	N/A	69.0 lbs.	N/A
Cross Tee to Cross Tee EA79415			24" x 48"	24" x 24"	48" x 48"	48" x 48"	48"	48"	100.0 lbs.	100.0 lbs.

Main beams tested as follows: EA79015 tested at 16.74 LBS/LF to 1/360 of 4' span.

48" cross tees tested as follows: EA79415 tested at 18.4 LBS/LF to 1/360 of 4' span.

Main Beam | Hanger Wire (-)

* Fixtures weighing more than 56 lbs. should be independently supported. Fixture weight is based on single fixture only. For end-to-end fixtures or other configurations not shown, consult your Armstrong representative.


NOTE: The above data is based on 48" hanger wire spacing, board weight of 1 LBS/SF, maximum deflection of tees not to exceed 1/360 of the span, and suspension system installed in accordance with ASTM C 636.

LIGHT FIXTURES

NOTE: Specify light fixtures designed to install with 2" web height suspension systems.

Manufacturer	Item #
Lithonia	CLRM-150 SRT-2x4_F MP4270
Guth	KLEENSEAL KRT 200
Morlite	CRGHEPA24 Series

DETAILS

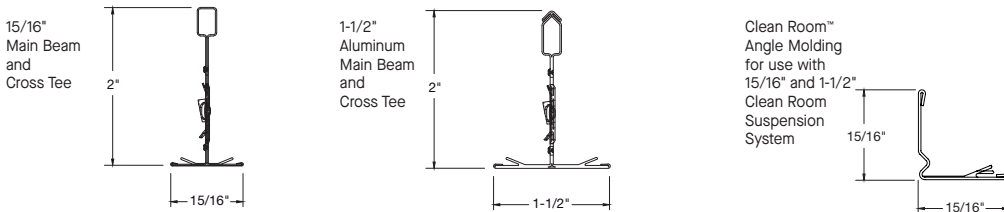

SEISMIC PERFORMANCE

Main Beams
EA79015, EA7900
Minimum Lbs. To Pull Out Compression/Tension
294.6

Cross Tees
** EA79415, EA79215, EA7940, EA7920
Minimum Lbs. To Pull Out Compression/Tension
492.4

ICC Reports
For areas under ICC jurisdiction, see ICC evaluation report number 1308 for allowable values and/or conditions of use concerning the suspension system components listed on this page. The report is subject to re-examination, revisions, and possible cancellation.

** Requires use of #6 Phillips self-tapping screw through cross tee end detail.

PHYSICAL DATA

Material
1-1/2" Aluminum with aluminum capped face- Gasketed
15/16" Aluminum with aluminum capped face- Gasketed
Surface Finish
Baked polyester
White aluminum - Capped face

Manufactured and tested in accordance with ASTM C635
Cross Tee/Main Beam Interface
Co-Extruded Aluminum Clean Room - Flush Fit
Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

End Detail for 1-1/2"
Main Beam: Integral
Cross Tee: Staked-on clip
End Detail for 15/16"
Main Beam: Integral
Cross Tee: Staked-on clip