


DUNE™
Square Lay-in & Tegular
fine texture

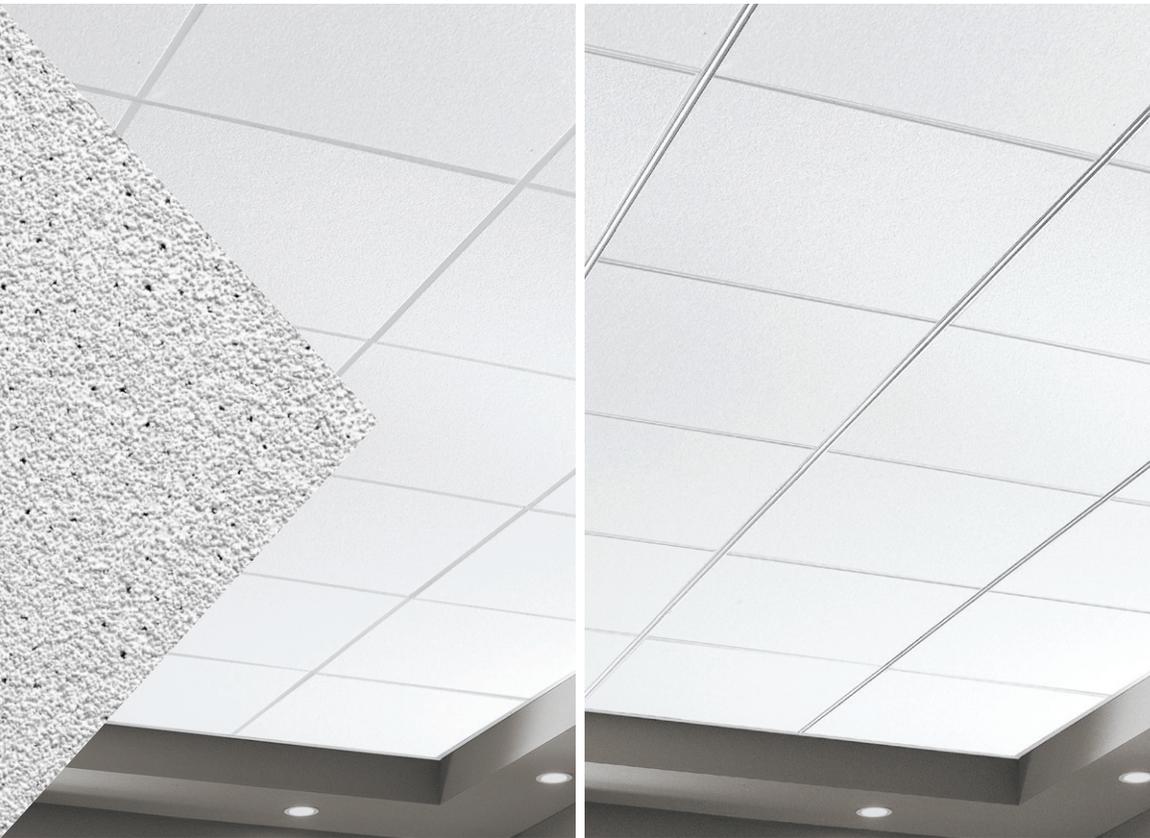

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Dune™ Square Lay-in panels with Prelude® XL®
15/16" suspension system

Dune Tegular panels with Interlude® XL HRC
9/16" suspension system

Fine-textured panels are non-directional and durable with standard acoustical performance.

KEY SELECTION ATTRIBUTES

-  Dune™ panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Upgrade look at a modest price
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1773HRC, 1774HRC, 1775HRC, 1776HRC, 1777HRC (check armstrongceilings.com/greengenie)
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 99%
- Durable – Scratch-resistant
- Non-directional visual reduces scrap and installation time
- Product can be recycled through the Armstrong Ceilings Recycling Program
- 30-Year Limited System Warranty against visible sag (excludes items 1796 and 1798), mold and mildew
- 10-Year replacement panel available for items 1772, 1773, 1774, 1776




COLOR



White
(WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

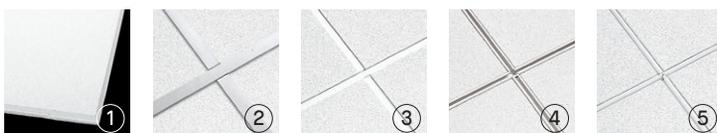

1. Dune™ Tegular
2. Dune™ Square Lay-in with Prelude® 15/16" suspension system
3. Dune™ Tegular with Suprafine® 9/16" suspension system
4. Dune™ Tegular with Silhouette® XL® 9/16" suspension system with 1/4" reveal
5. Dune™ Tegular with Interlude® XL® HRC 9/16" suspension system

DUNE™

Square Lay-in & Tegular
fine texture



USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 99%

Declare.

SUSTAIN™
High Performance
Sustainable Ceiling Systems

GREENGUARD
Gold Certified
(details below)

LEED®
WELL™ LBC

UP TO **56%** RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/repairable producer resp.
- biobased materials
- recycled content
- sourcing of low materials
- material ingredient reporting
- low emitting/low materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
DUNE™ 15/16" Square Lay-in 	1	1772	24 × 24 × 5/8" <input type="checkbox"/>
		1850	24 × 24 × 5/8" <input type="checkbox"/>
		1773 1773HRC	24 × 48 × 5/8" <input type="checkbox"/>
		1851	24 × 48 × 5/8" <input type="checkbox"/>
		1796	20 × 60 × 3/4" <input type="checkbox"/>
		1798	30 × 30 × 3/4" <input type="checkbox"/>
3/4" or 5/8" Thick – 15/16" Square Lay-in			
Made-to-Order Sizes		Width	Length
		12" - 30"	18" - 72"

4-6
WEEKS
order to ship

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$


UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =							Scratch			
0.50 30	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard™	0.81	*	*	*	*	Std	*	*
0.50 30	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr
N/A	N/A	Class A	0.81	*	Std	*	*	Std	*	1-Yr

MORE ITEMS ▶

Red Numbers are Fire Guard items.

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).
Fire Guard™: A fire-resistant ceiling when used in applicable UL assemblies.
ASTM E1264 Classification
Type III, Form 2, Pattern C E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes large made-to-order panels.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Acoustical Performance
CAC testing conducted using Prelude® suspension system.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG UL 2818



Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

Insulation Value
R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty (Excludes items 1796, 1798, and large other size panels)

Weight; Square Feet/Carton
1772 – 0.94 lbs/SF; 64 SF/ctn
1773 – 0.88 lbs/SF; 64 SF/ctn
1796 – 1.33 lbs/SF; 67 SF/ctn
1798 – 1.14 lbs/SF; 50 SF/ctn
1850 – 1.19 lbs/SF; 48 SF/ctn
1851 – 1.22 lbs/SF; 64 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
1772M, 1850M, 1773M, 1851M, 1796M, 1798M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

DUNE™

Square Lay-in & Tegular
fine texture



USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 99%

Declare.

SUSTAIN™
High Performance
Sustainable Ceiling Systems

GREENGUARD
Gold Certified
(details below)

LEED™
WELL™
LBC

UP TO **56%** RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recycle/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance.


\$\$\$

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	UL Classified Acoustics		Total Acoustics ¹	Fire Performance	Light Reflect	Bio-Block Anti-Mold/ Mildew	Humi-Guard+ Sag Resistant	Certified Low VOC Emissions	DURABILITY Scratch	Recycled Content	Recycle Program	30-Yr Warranty
				NRC + CAC	=										
DUNE™ 15/16" Angled Tegular	12	1774	24 × 24 × 5/8"	0.50	35	N/A	Class A	0.81	*	*	*	*	Std	*	*
		1774HRC	24 × 24 × 5/8"	0.50	35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
		1853	24 × 24 × 5/8"	0.50	35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
9/16" Beveled Tegular	29	1776	24 × 48 × 5/8"	0.50	35	N/A	Class A	0.81	*	*	*	*	Std	*	*
		1776HRC	24 × 48 × 5/8"	0.50	35	N/A	Class A	0.81	*	*	*	*	Std	*	*
		1852	24 × 24 × 5/8"	0.50	35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
Made-to-Order Sizes	44 48 52 56	1777	24 × 48 × 5/8"	0.50	35	N/A	Class A	0.81	*	*	*	*	Std	*	*
		1777HRC	24 × 48 × 5/8"	0.50	35	N/A	Class A	0.81	*	*	*	*	Std	*	*
		1852	24 × 24 × 5/8"	0.50	35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
3/4" or 5/8" Thick – 15/16" & 9/16" Angled Tegular			Width	Length	N/A	N/A	N/A	Class A	0.81	*	Std	*	Std	*	1-Yr
4-6 WEEKS order to ship			12" - 30"	18" - 72"											

Red Numbers are Fire Guard items.

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber
Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies (Class A)

ASTM E1264 Classification
Type III, Form 2, Pattern C E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes large made-to-order panels.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Acoustical Performance
CAC testing conducted using Prelude® suspension system.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

Insulation Value
R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1774, 1774HRC, 1775, 1775HRC – 0.75 lbs/SF; 64 SF/ctn
1776, 1776HRC, 1777, 1777HRC – 0.75 lbs/SF; 64 SF/ctn
1852, 1853 – 1.20 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
1775M, 1777M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

