

DUNE™ Second Look®

Scored Tegular
fine texture



SUSTAIN™
High Performance
Sustainable Ceiling Systems



LEED® WELL™ LBC


UP TO **41% RECYCLED CONTENT**

Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

\$\$\$\$

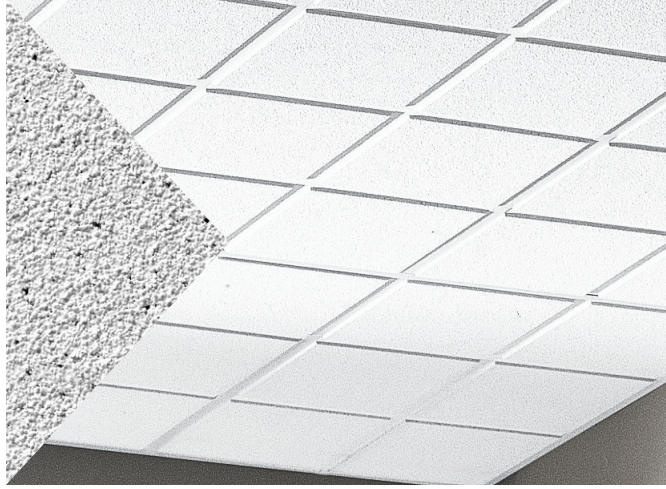

Dune™ Second Look® I panels with Prelude® XL® 15/16" suspension system

Fine textured panels with geometric scored visuals.

KEY SELECTION ATTRIBUTES


- Upgrade look at a modest price
- Dune™ Second Look® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Content – 99%
- Durable – Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for item 2711, 2712, 2722
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant



FACE VIEW



Second Look I panel – Scoring creates nominal 12" x 12" squares



Second Look II panel – Scoring creates nominal 24" x 24" squares

COLOR



White (WH)

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	
DUNE™ Second Look® I 15/16" Angled Tegular	11	2711	24 x 48 x 3/4"	
DUNE™ Second Look® II 15/16" Angled Tegular	11	2712	24 x 48 x 3/4"	
9/16" Angled Tegular	27	2722	24 x 48 x 3/4"	

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect	Bio-Block	Humi-Guard+	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	Warranty
NRC + CAC				Anti-Mold/Mildew	Sag Resistant		Scratch			
0.50 35*	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35*	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35*	N/A	Class A	0.81	*	*	*	*	Std	*	*

SUSPENSION SYSTEMS

NOTE: It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

ASTM E1264 Classification
Type A, Form A1.2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Insulation Value
R Factor – 1.6 (BTU units); R Factor – 0.28 (Watts units)

Design Consideration
Do not mix Dune™ Second Look® with standard Dune panels in the same room. It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1.00 LBS/SF; 80 SF/CTN

Minimum Order Quantity
1 carton

Metric Items Available
2711M, 2722M, 2712M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

