

3form Elements – Divy

Acoustic Baffle



3form Elements – Divy Baffle pattern Margin in Emerald

Fill flat, empty, overhead spaces by putting up this Sola Felt™ panel that's attached to a birch frame, and suspended on cables.

KEY SELECTION ATTRIBUTES

- Made using our sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- NRC rating of 0.75
- Easily installs using engineered hardware that comes with a ceiling cover plate for clean installations
- Available in 22 standard colors and five patterns

3form Elements – Divy

Acoustic Baffle

SOLA FELT™ COLORS Due to dye lot variations, shade may vary from actual product.



Zinc (FZN)



Nickel (FNI)



Platinum (FPL)



Armor (FAR)



Steel (FSL)




Cast (FCA)



Dune (FDN)




Driftwood (FDW)




Silt (FSI)




Mineral (FML)




Ebony (FBN)



Nightfall (FNF)




Admiral (FAD)



Dusk (FDK)




Steelblue (FSB)




Emerald (FEM)



Mustard (FMU)




Citrine (FCR)




Ochre (FOC)



Aries (FAS)



Saffron (FSF)



Jasper (FJP)

HARDWARE FINISHES



Stainless Steel (SS)



Black Oxide (BO)

3form Elements – Divy

Acoustic Baffle

VISUAL SELECTION

	Item No. ♦	Nominal Dimension (Depth × Length × Thickness)
DIVY BAFFLE	See Below	24-3/8 × 72-3/8 × 1-1/2"

PERFORMANCE


Dots represent high level of performance.

Fire Rating	Certified Low VOC Emissions
Class A	*


ACOUSTICAL INFORMATION

NRC
0.75


PATTERN OPTIONS




Margin
BPAS1338D60_ _ _ ♦



Net
BPAS1338D61_ _ _ ♦



Plane
BPAS1338D62_ _ _ ♦




Quint
BPAS1338D27_ _ _ ♦



Vim
BPAS1338D63_ _ _ ♦

♦ When specifying or ordering, include the appropriate 3-digit color suffix (e.g. BPAS1338D60 F C R). For custom sizes, shapes, or colors, contact ASQuote@armstrong.com.

INSTALLATION

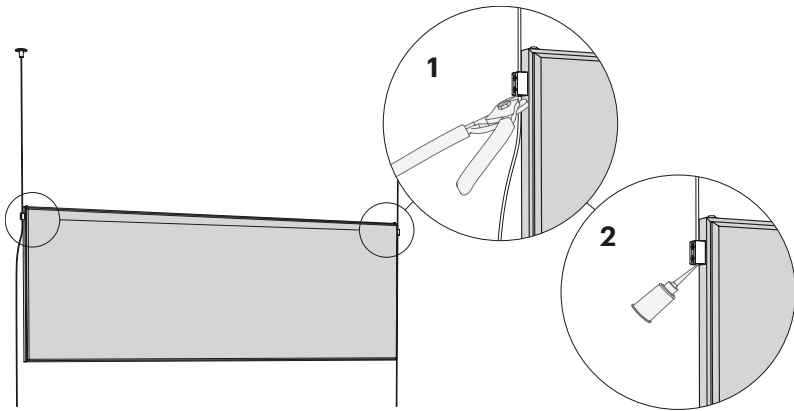

Begin by anchoring the first cable assembly to the ceiling using hardware appropriate for the substrate. Using the baffle and side brackets, perform a dry fit to determine the location of the second cable assembly. Install the side brackets so they are positioned 1.5 inches below the desired top edge of the panel. Once aligned, tighten the set screws to secure the cables and attach the panel. Trim any excess cable extending below the side brackets and apply a small drop of super glue to the cut end of the cable to prevent fraying.

View full installation instructions for more details.

PHYSICAL DATA

Material
3/8" thick (9mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout and Birch wood frame.

Fire Performance
US Only: Flame Spread Index 0-25. Smoke Developed Index 450 or less. Class A per ASTM E84.

Application Considerations
Panel color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.
Divy Baffles should not be installed near sources of heat greater than 158° F.

Acoustical Performance
Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of 0.75 NRC. Contact TechLine for details at techline@armstrong.com

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Lead Times
4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

Cleaning and Disinfecting
Sola Felt should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

Warranty
3form 2-year Limited Warranty

Weight; Pieces/Carton
36 LBS/panel
Ordered by the piece (1 PC/CTN)