

3form Elements – Hush Screen

Suspended Acoustic Panels



3form Elements – Hush Screen Brush pattern in Emerald

Define space and absorb sound in style with these suspended Sola Felt™ panels.

KEY SELECTION ATTRIBUTES

- Specify pattern designs with 23 styles in two sizes to complement any aesthetic
- Choose from 22 standard Sola Felt™ colors
- Made using sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- NRC rating of up to 0.55, depending on pattern
- Easy to install with options to anchor to the ceiling deck above a drop ceiling, attach to a unistrut, or suspended ceiling grid
- Multi-functional tackable surface


3form Elements – Hush Screen

Suspended Acoustic Panels

SOLA FELT™ COLORS Due to dye lot variations, shade may vary from actual product.




Zinc (FZN)



Nickel (FNI)




Platinum (FPL)



Armor (FAR)



Steel (FSL)



Cast (FCA)



Dune (FDN)




Driftwood (FDW)




Silt (FSI)




Mineral (FML)




Ebony (FBN)



Nightfall (FNF)




Admiral (FAD)



Dusk (FDK)




Steelblue (FSB)



Emerald (FEM)



Mustard (FMU)



Citrine (FCR)




Ochre (FOC)



Aries (FAS)



Saffron (FSF)



Jasper (FJP)

HARDWARE FINISHES



Stainless
Steel (SS)



Black
Oxide (BO)

ACCESSORIES

Hardware Type	
Order 1 of H01-H06 for each panel ordered	
H01	Universal Mounting Kit (Cost Adder)
H02	Unistrut Mounting Kit (No Added Cost)
H03	Grid Mounting Kit (No Added Cost)
H04	Drywall Mounting Kit (No Added Cost)
H05	Wood Mounting Kit (No Added Cost)
H06	Concrete Mounting Kit (No Added Cost)
H07*	Panel-to-Panel Connector Kit (3/kit; Cost Adder)
H08*	Universal Floor Mounting Kit (Cost Adder)

*Optional Item

3form Elements – Hush Screen

Suspended Acoustic Panels

VISUAL SELECTION


PERFORMANCE

Dots represent high level of performance.

ACOUSTICAL INFORMATION

	Item No. ◆	Nominal Dimension (W × L × Depth)	Fire Rating	Certified Low VOC Emissions	NRC *
3FORM ELEMENTS HUSH SCREEN SUSPENDED ACOUSTICAL PANELS	BPAS1336	44 × 96 × 3/8"	Class B	*	0.15 - 0.55
	BPAS1335	22 × 96 × 3/8"	Class B	*	0.15 - 0.55
	BPAS1337	23.5 × 96 × 3/8"	Class B	*	0.15 - 0.55
Small Hush Screen - Breeze Blocks Patterns					


ITEM NUMBER KEY




ANCHORING KIT

AP2	2 Anchor Points (Top Only)
AP4	4 Anchor Points (Top and Bottom)

PATTERN OPTIONS ◆

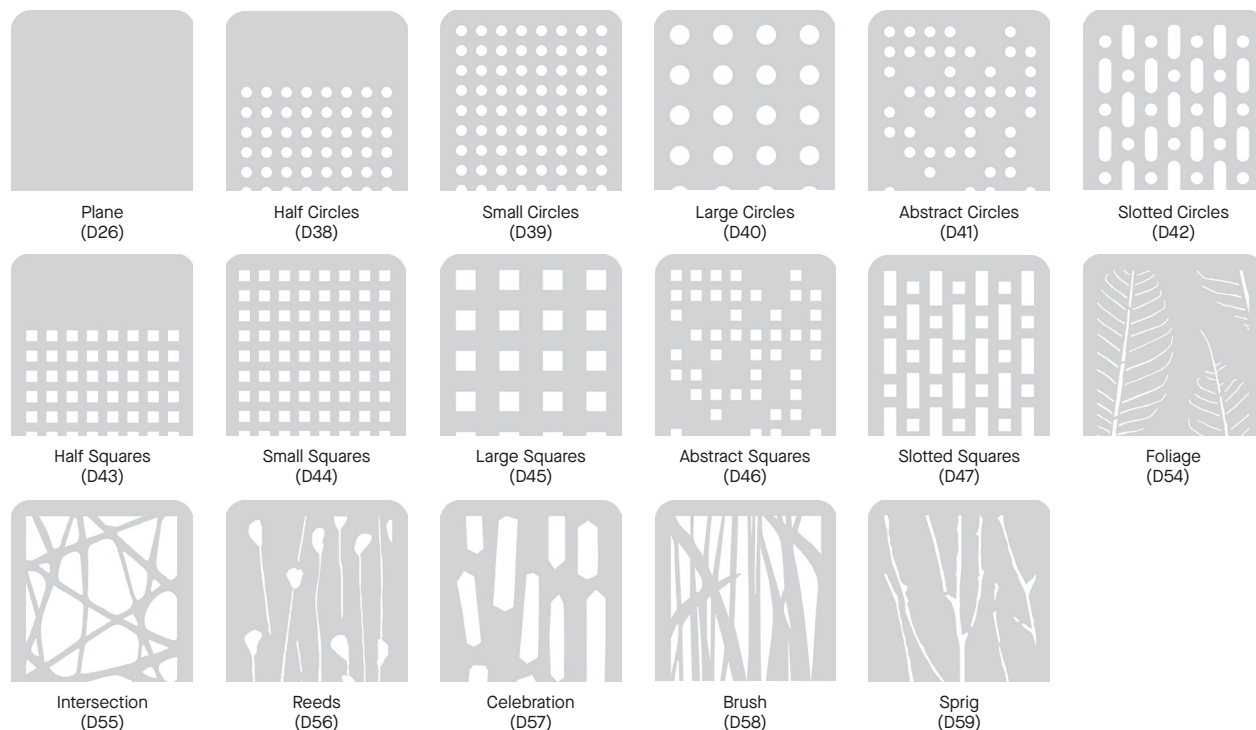

BREEZE BLOCKS PATTERNS

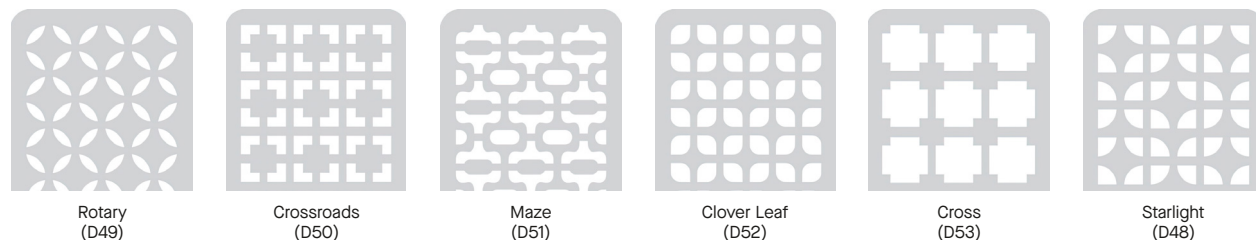

*Pattern dependent
 ◆ When specifying or ordering, include the appropriate 3-digit suffix for anchoring method (see page xx) and 3-digit color suffix for the finish (e.g. BPAS1336D38 A P 2 H F 1 E Z N)
 For custom sizes, shapes, or colors, contact ASQuote@armstrong.com.

TechLine 877 276-7876

armstrong.com/3formelements


Armstrong®
World Industries

3form

3form Elements – Hush Screen

Suspended Acoustic Panels


DESIGN OPTIONS

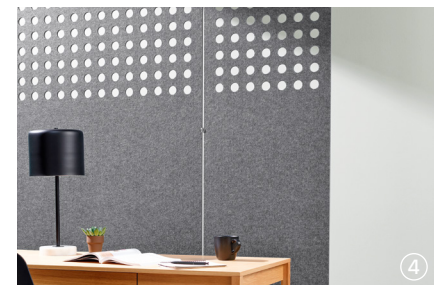

1. Maze pattern in Steelblue
2. Abstract Circles pattern in Dusk
3. Hush Screen Collection
4. Half Circles pattern in Steel

PATTERN & LAYOUT IDEAS

Abstract Circles

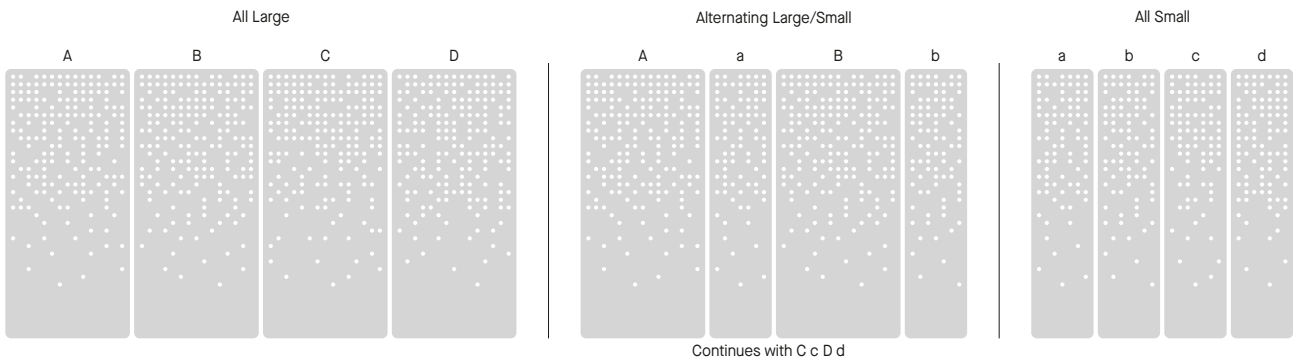

NOTE: Refer to instructions for installation guidance.

PHYSICAL DATA

Material

3/8" thick (9mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout.

Fire Performance

US Only: Flame Spread Index 26-75. Smoke Developed Index 450 or less. Class B per ASTM E84.

CAN/ULC S102 surface burning characteristics.

Flame Spread Index of 75 or less and Smoke Developed Index of 200 or less.

Application Considerations

Panel color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.

Hush Screen panels should not be installed near sources of heat greater than 158° F.

Acoustical Performance

Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of 0.15 - 0.55 NRC depending on pattern. Contact TechLine for details at techline@armstrong.com

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations

Quick and simple installation involves fastening panels to ceilings with anchoring kits and optionally floor mounting with a floor attachment kit. See installation instructions for details.

Lead Times

4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

Cleaning and Disinfecting

Sola Felt should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

Warranty

3form 2-year Limited Warranty

Weight: Pieces/ Carton

0.39 lbs/SF

Ordered by the piece (1pc/ctn)