

3form Elements – Hush Slim Baffle

Sound Absorbing Baffles



3form Elements – Hush Slim Baffle in Driftwood and Silt

Create flexible design options using suspended baffles made of acoustic Sola Felt™ from 3form.


KEY SELECTION ATTRIBUTES

- Available in four standard sizes: 49-1/2" or 97-1/2" lengths with 6" or 12" depths (2" thickness)
- Made using our sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- NRC rating of 0.70
- Class B fire rating (US only)
- Easy to specify and install
- Available in 22 standard colors

3form Elements – Hush Slim Baffle

Sound Absorbing Baffles

SOLA FELT™ COLORS Due to dye lot variations, shade may vary from actual product.




Zinc (FZN)



Nickel (FNI)



Platinum (FPL)



Armor (FAR)



Steel (FSL)



Cast (FCA)



Dune (FDN)




Driftwood (FDW)




Silt (FSI)



Mineral (FML)




Ebony (FBN)



Nightfall (FNF)




Admiral (FAD)



Dusk (FDK)



Steelblue (FSB)




Emerald (FEM)



Mustard (FMU)




Citrine (FCR)




Ochre (FOC)



Aries (FAS)



Saffron (FSF)



Jasper (FJP)



3form Elements – Hush Slim Baffle

Sound Absorbing Baffles

VISUAL SELECTION

	Item No. ◆	Nominal Dimension (D × L × Thickness)
HUSH SLIM BAFFLE	BPAS1334S01_ _ _	6 × 49-1/2 × 2"
	BPAS1334S02_ _ _	6 × 97-1/2 × 2"
	BPAS1334S03_ _ _	12 × 49-1/2 × 2"
	BPAS1334S04_ _ _	12 × 97-1/2 × 2"

◆ When specifying or ordering, include the appropriate 3-digit color suffix (e.g. BPAS1334S01 F A D). For custom sizes, shapes, or colors, contact ASQuote@armstrong.com.

PERFORMANCE


Dots represent high level of performance.

Fire Rating	Certified Low VOC Emissions
Class B	*
Class B	*
Class B	*
Class B	*

ACOUSTICAL INFORMATION

Shape Depth	NRC
6"	0.70
6"	0.70
12"	0.70
12"	0.70

INSTALLATION Anchor a 1/4"-20 Threaded Rod (provided by others) in ceiling at mounting locations. The installed rod should extend 1/2" below the line of the finish ceiling. Reference installation instructions for full details.

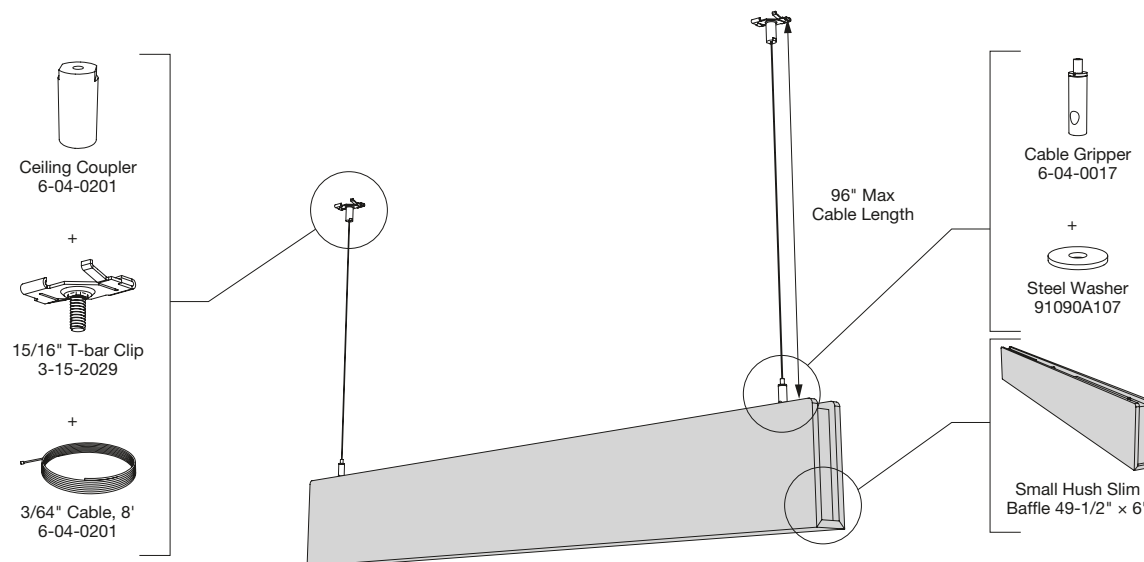

PHYSICAL DATA

Material

3/8" thick (9mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout.

Fire Performance

Flame Spread Index 75 or less. Smoke Developed Index 450 or less. Class B per ASTM E84.

CAN/ULC S102.2 surface burning characteristics. Flame Spread Rating of 75. Smoke Developed Classification of 200.

Application Considerations

Baffle color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.

Hush Slim Baffles should not be installed near sources of heat greater than 158° F.

Acoustical Performance

Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of up to 0.70 NRC. Contact TechLine for details at techline@armstrong.com.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations

Anchor a 1/4"-20 Threaded Rod (provided by others) in ceiling at mounting locations. The installed rod should extend 1/2" below the line of the finish ceiling.

Lead Times

4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

Cleaning and Disinfecting

Sola Felt should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

Warranty

3form 2-year Limited Warranty

Weight: Pieces/Cartron

1.2 lbs./in. ft.

Ordered by the piece (1 pc./ctn.)