
# METALWORKS™ Linear - Classics

Standard Wall Planks smooth texture





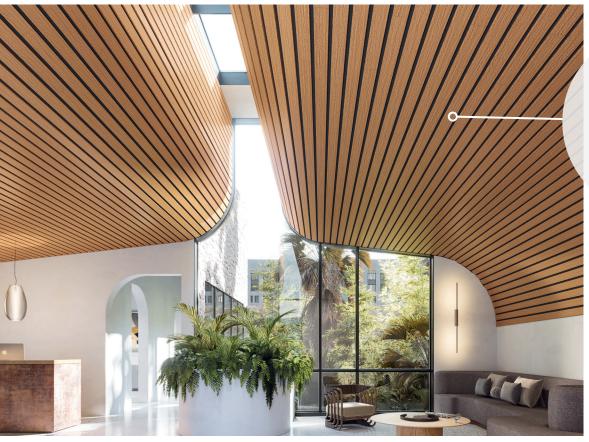

CAD/Revit® drawings at armstrongceilings.com/cadrevit CAD/Revit® drawings at:

plus capabilities

armstrongceilings.com/capabilities See more photos at: armstrongceilings.com/photogallery

MetalWorks™ Linear - Classics wall system in Sequels™ La Jolla Oak

Durable, metal panels in more widths for a variety of flexible and unique acoustical interior solutions.


### **KEY SELECTION ATTRIBUTES**



Four new Sequels™ pre-coat, wood-look finishes are part of the Sustain™ portfolio and FAST134 program



 MetalWorks™ FASTPeel™ panels feature an easier-to-remove protective film



 Nominal 2", 4", 6", 8", 10", and 12" wide panels, including nominal 1" reveal (contact ASQuote for custom capabilities at asquote@armstrongceilings.com)

- Available in 17 Effects<sup>™</sup> Wood look finishes that are part of the Sustain portfolio
- MetalWorks<sup>™</sup> Linear Classics panels are part of the Sustain™ portfolio, and meet the most stringent industry sustainability compliance standards today
- · Mix and match widths for a striated visual
- CleanAssure<sup>™</sup> family of products includes disinfectable panels, suspension systems, and trim



- · Select products included in the FAST134 program - ready to ship in 4 weeks or less
  - · Install on wall horizontally
  - · Create 90° angled or curved ceiling-to-wall transitions
  - · Acoustical options with microperforated panels
  - · Fast and easy installation



High Performance Sustainable Ceiling Systems

LOCATION DEPENDENT



For LEED contribution contact TechLine

WITH INFILL PANEL



Declare.



MetalWorks™ Linear - Classics Ceiling System with 4" Perforated and Unperforated panels in White

## STANDARD COLORS & FINISHES

Standard Wall Planks smooth texture

#### Painted



White (WH2)



Gun Metal Grey



Sequels™ Pre-coated Coil, Fast Lead Time



La Jolla Oak (SQOK) (SQWN)



Cape May Cherry (SQCH)



Montauk Driftwood

Effects™ Classic Dye-Sublimation



Effects Cherry (FXCH)

Effects

Walnut

(FXWN)



Effects Dark Cherry (FXDC)



Effects Oak (FXOK)



Effects™ Bold

Dye-Sublimation

Effects Sea Salt (FXSS)

Effects

Poppy Seed (FXPS)



Ginger (FXGR)

Effects

Peppercorn (FXPC)



Nutmeg (FXNM)

Effects

Almond

(FXAL)



Effects™ Subtle

Dye-Sublimation

(FXSE)



Macadamia (FXMA)







Flax (FXFL)

Effects

Coriander (FXCO)

(FXWE) Due to printing limitations, shade may vary from actual product.

Effects Walnut

Espresso

## **CUSTOM COLORS & FINISHES**



Custom Colors



Finishes Available

For custom options contact ASQuote, ASQuote@armstrongceilings.com

## PERFORATION OPTIONS (1:2 scale shown)



M1 (Unperforated)



М2 (Microperforated)

# METALWORKS™ Linear - Classics

Standard Wall Planks smooth texture



Declare.





LOCATION DEPENDENT

### VISUAL SELECTION

					ance	only)	Disinfe	ctab
			Dimensions Nominal W x L x (Inches)	хН	Fire Performance	Light Reflect	Fog	Č
	Item No.◆	Description	Custom Sizes Available		(3)			Ç
METALWORKS <sup>™</sup> Linear – Classics Planks Interior Only	8120	2" Unperforated	96 × 2 × 5/8"		Class A	0.73	۰	
	5490	4" Unperforated	96 × 4 × 5/8"		Class A	0.73	•	-
	7160	6" Unperforated	96 × 6 × 5/8"		Class A	0.73	۰	-
	5491	8" Unperforated	96 × 8 × 5/8"		Class A	0.73	•	
	8122	10" Unperforated	96 × 10 × 5/8"		Class A	0.73	۰	-
	5570	12" Unperforated	96 × 12 × 5/8"		Class A	0.73	•	
METALWORKS Linear - Classics Planks	8121	2" Microperforated (with plain border and acoustical fleece)	96 × 2 × 5/8"		Class A	N/A	•	•
Interior Only	5492	4" Microperforated (with plain border and acoustical fleece)	96 × 4 × 5/8"		Class A	N/A	٠	•
	7161	6" Microperforated (with plain border and acoustical fleece)	96 × 6 × 5/8"		Class A	N/A	•	4
	5493	8" Microperforated (with plain border and acoustical fleece)	96 × 8 × 5/8"		Class A	N/A	٠	
	8123	10" Microperforated (with plain border and acoustical fleece)	96 × 10 × 5/8"		Class A	N/A	•	
	5571	12" Microperforated (with plain border and acoustical fleece)	96 × 12 × 5/8"		Class A	N/A	•	-

PERFORMANCE Dots represent high level of performan
--

9	(White only)	Clea Disinfe	nAssure ctable Pa	anels		DU	JRABILI	ГҮ		
Fire Performance	Light Reflect	Fog	Spray	Wipe	Wash	Scrub	Impact	Scratch	Soil	Acoustics
			<b>E</b>	<b>P</b>			Q'^\			NRC
Class A	0.73	۰	۰	۰	0	۰	۰	۰	۰	N/A
Class A	0.73	۰	۰	۰	0	۰	۰	۰	۰	N/A
Class A	0.73	۰	۰	٠	•	۰	٠	۰	۰	N/A
Class A	0.73	۰	۰	٠	•	۰	٠	۰	۰	N/A
Class A	0.73	٠	۰	٠	•	۰	٠	٠	٠	N/A
Class A	0.73	•	٠	٠	•	٠	٠	٠	٠	N/A
Class A	N/A	۰	۰	٠	۰	۰	۰	۰	۰	N/A
Class A	N/A	۰	۰	•	٠	٠	۰	۰	۰	0.70 0.85*
Class A	N/A	•	۰	٠	٠	٠	۰	۰	۰	0.70 0.85*
Class A	N/A	۰	۰	۰	٠	٠	۰	۰	۰	0.70 0.85*
Class A	N/A	٠	٠	0	•	٠	•	٠	•	0.70 0.85*
Class A	N/A	٠	٠	0	۰	٠	•	•	•	0.70 0.85*




FAST134 program items ready to ship from manufacturer in 4 weeks or less. Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

- ♦ When specifying or ordering, include the appropriate 3- or 4-letter color suffix (e.g., 5492 <u>W H</u> 2, 5570 <u>E X C H</u>). When specifying or ordering exterior finishes, place a "2" after the item color suffix (e.g., 5491 <u>E X C H</u> 2). NOTE: Exterior finishes are only available on M1 planks.


  \* NRC 0.85 with optional fiberglass infill.

  \*\* Sequels" Finishes are for interior use only

## INSTALLATION DETAILS - WALLS



Main Beam Carrier 2 (MBC2) installs on the wall perpendicular to desired plank length direction





# METALWORKS™ Linear - Classics

Standard Wall Planks smooth texture



### Declare.

#### SUSPENSION SYSTEM & ACCESSORIES

	Item No.◆	Description	Dimensions (Inches) Nominal W x L x H	Color	Pieces/Carton
Suspension Systems	7177	Main Beam Carrier Assembly – G90 Mill Finish	144 × 1-3/4 × 2-3/4"	N/A	10
Interior Only	XL8945P	4' Drywall Cross Tee - Interior Only	48 × 1-1/2 × 1-1/2"	N/A	36
	XL8945G90	FrameAll™ 4' Drywall Cross Tee	48 × 1-1/2 × 1-1/2"	N/A	36
	XL7936G90	3' Drywall Cross Tee - Exterior	36 × 1-1/2 × 1-1/2"	N/A	36
	XL8926G90	2' Drywall Cross Tee - Exterior	24 × 1-1/2 × 1-1/2"	N/A	36
Wall-to-Wall	8161	Pressure Spring	3/4 × 3/4 × 1-1/8"	N/A	50
Installations	BERC2	Beam End Retaining Clip	N/A	N/A	200
	5574	Carrier Molding Molding - Exterior Available	120 × 1 × 1"	WH, SG, MY, BL and all Effects Wood Looks	10
	7800	Hemmed Angle Molding	144 × 7/8 × 7/8"	WH, BL	30
	HD7801G90	10' Hemmed Angle Molding – Exterior	120 × 7/8 × 7/8"	N/A	30
Other	7237	Cut Plank Support Bracket	2-1/2 × 2-1/2 × 1-1/4"	N/A	50
Accessories	5494	Contrast Filler Strip	96 × 1-1/4 × 1/16"	50	Black

<sup>\*</sup> Items with the same finish name will coordinate but may not be an exact color match.

#### **ACCESSORIES**

	Item No.◆	Description	Pieces/ Carton	Finish Selection
Splice Plates	8159	2" Panel Splice	50	N/A
	5495	4" Panel Splice	50	N/A
	7163	6" Panel Splice	50	N/A
	5496	8" Panel Splice	50	N/A
End Caps	8138	2" End Cap	50	WH, SG, MY, BL2 and all Effects Wood Looks
	5581	4" End Cap	50	WH, SG, MY, BL2 and all Effects Wood Looks
	7162	6" End Cap	50	WH, SG, MY, BL2 and all Effects Wood Looks
	5582	8" End Cap	50	WH, SG, MY, BL2 and all Effects Wood Looks
	8139	10" End Cap	50	WH, SG, MY, BL2 and all Effects Wood Looks
	5583	12" End Cap	50	WH, SG, MY, BL2 and all Effects Wood Looks

<sup>◆</sup> When specifying or ordering, include the appropriate 4- or 5-letter color suffix (e.g., 5583 F X C H, 5583 F X C H, 2).

## PHYSICAL DATA

Material

Electrogalvanized Steel - thickness 0.028"

Surface Finish

White, Silver Grey, Gun Metal Grey: Powder Coated Effects™: Powder Coated, dye sublimation post-production Sequels™: Pre-coated coil.

Natural Reflections finishes and other colors are available as custom. Contact ASQuote@armstrongceilings.

Edge Detail

Square with extended flange. To create contrast visual, flange is covered with 1-1/4" Black Contrast Filler Strip Item 5494.

Fire Performance Class A: ASTM E84 and CAN/ULC S102.

Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

ASTM E1264 Classification

Fire Class - Class A

Unperforated – Type XX, Pattern G Perforated – Type XX, Pattern C

Design Considerations

While we strive to ensure exact color matches, various factors such as differences in materials and painting processes can affect how colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, items with the same finish name will coordinate but may not be an exact color match.

Installation Considerations

Panels with certain product finishes, e.g., Effects™ and Natural Reflections, are not MetalWorks™ FASTPeel™ panels and will be protected by other means for packaging and handling purposes.

Seismic Restraint

MetalWorks Linear panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Wind Uplift Performance

All panels tested for wind uplift Classes 30, 60, and 90. Specific installation recommendations to meet these wind classes are available. There is no acoustical fleece on exterior panels. For more information, contact TechLine at 1 877 276 7876.

FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Cleaning and Disinfecting Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton

8120 – 1.61 lbs/SF; 24 pcs/ctn or 192 LF/ctn; 32.00 SF/ctn 5491 – 51.61 lbs/SF; 16 pcs/ctn or 128 LF/ctn; 42.66 SF/ctn 7160 – 1.61 lbs/SF; 12 pcs/ctn or 96 LF/ctn; 48.00 SF/ctn 5491 – 1.61 lbs/SF; 10 pcs/ctn or 80 LF/ctn; 53.33 SF/ctn 8122 – 1.61 lbs/SF; 8 pcs/ctn or 64 LF/ctn; 53.33 SF/ctn

8122 – 1.61 lbs/SF; 8 pcs/ctn or 64 LF/ctn; 53.33 SF/ctn 5570 – 1.61 lbs/SF; 6 pcs/ctn or 48 LF/ctn; 48.00 SF/ctn 8121 – 1.61 lbs/SF; 24 pcs/ctn or 192 LF/ctn; 32 SF/ctn 5492 – 1.61 lbs/SF; 16 pcs/ctn or 128 LF/ctn; 42.66 SF/ctn 7161 – 1.61 lbs/SF; 12 pcs/ctn or 96 LF/ctn; 48.00 SF/ctn 5493 – 1.61 lbs/SF; 10 pcs/ctn or 80 LF/ctn; 53.33 SF/ctn 8123 – 1.61 lbs/SF; 8 pcs/ctn or 64 LF/ctn; 53.33 SF/ctn 5571 – 1.61 lbs/SF; 6 pcs/ctn or 48 LF/ctn; 48.00 SF/ctn



<sup>♦</sup> When specifying or ordering, include the appropriate 4- or 5-letter color suffix (e.g., 5583 F X C H, 5583 F X C H 2). NOTE: Due to the non-standard suspension system of this product, call TechLine at 1 877 276 7876 to place an order.