


PRELUDE® Plus XL® Fire Guard™
 PRELUDE® XL®
 for Exterior Applications
 Exposed Tee Suspension System

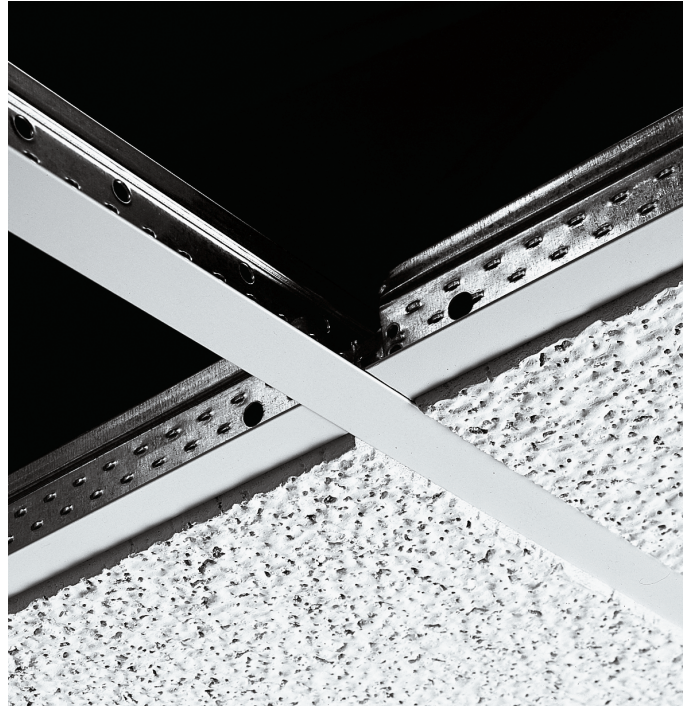

Prelude® Plus XL® suspension system

A 15/16" suspension system for severe environmental performance.

KEY SELECTION ATTRIBUTES

- Seismic Rx® Suspension System saves time and money; ICC-ES approach to installations (ESR-1308)
- Prelude® Plus XL® Fire Guard™ and Prelude® XL® for Exterior Applications are part of the Sustain™ portfolio and meets the most stringent industry sustainability compliance standards today – White only
- Systems conform to ASTM C635 for Severe Environmental Performance
- Rotary-stitched during manufacture for torsional strength and stability
- 10-Year Limited Warranty; 30-Year Limited Warranty with HumiGuard® Plus or HumiGuard® Max products
- XL® staked-on end detail provides secure locked connection
- PeakForm® profile increases strength and stability
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning)
- SuperLock™ main beam clip engineered for secure connection and fast, accurate alignment
- 10-Year replacement items available



- PRELUDE® XL® For Exterior Applications
- Minimum G90 hot-dipped galvanized steel with prefinished G90 steel capping
 - Suitable for wind uplift applications with appropriate bracing
- PRELUDE® Plus XL® Fire Guard™
- Systems are minimum G60 hot-dipped galvanized steel with prefinished aluminum capping for enhanced corrosion resistance

TYPICAL APPLICATIONS

PRELUDE Plus XL Fire Guard

- Locker rooms
- Food preparation areas

PRELUDE XL For Exterior Applications

- Non-exposed exterior corridors
- Drive-thru areas
- Indoor parking garages
- Use with Woodworks® Linear Solid Wood Panels for Exterior

COLORS

Fire Guard™ Only



Exterior Only



VISUAL SELECTION

	Item No. ♦	Description	Dimensions (Inches)	HANGER SPACING* LBS/LF			PERFORMANCE					PACKAGING	
				2 Ft.	4 Ft.	5 Ft.	Fire Guard™	Seismic Category	CleanAssure™ Disinfectable Grid			Pieces/ Carton	LF/ Carton
							•	•	Fog	Spray	Wipe		
PRELUDE® Plus XL® Fire Guard™ (Red Numbers are Fire Guard items)	HD8201 _ _	12' HD Main Beam	144 x 15/16 x 1-11/16"	12.75	16.73	N/A	•	•	•	•	•	20	240
15/16"	XL8240 _ _	4' Cross Tee	48 x 15/16 x 1-1/2"	12.75	N/A	N/A	•	•	•	•	•	60	240
	XL8223 _ _	2' Cross Tee	24 x 15/16 x 1-1/2"	38.63	N/A	N/A	•	•	•	•	•	60	120
Molding	HD7801 _ _	10' Hemmed Angle Molding (7/8")	120 x 7/8 x 7/8"	N/A	N/A	N/A	N/A	N/A	•	•	•	30	300

* Simple Span
 ♦ Add 2-letter color suffix to item number when specifying or ordering. (ex. HD7801G90A B L)

Dots represent high level of performance.

ASTM Class
 HD - Heavy-duty
 ID - Intermediate-duty
 LD - Light-duty



PRELUDE® Plus XL® Fire Guard™ PRELUDE® XL® for Exterior Applications Exposed Tee Suspension System



LEED® WELL™ LBC

UP TO **30% RECYCLED CONTENT**

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/repairable producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE

PACKAGING


	Item No. ♦	Description	Dimensions (Inches)	HANGER SPACING* LBS/LF			CleanAssure™ Disinfectable Grid					PACKAGING		
				2 Ft.	4 Ft.	5 Ft.	Fire Guard™	Seismic Category DEF	Fog	Spray	Wipe	Pieces/ Carton	LF/ Carton	
PRELUDE XL® for Exterior Applications 15/16"	7301G90A_ _	12' HD Main Beam	144 x 15/16 x 1-11/16"	N/A	16.50	6.92	N/A	*	*	*	*	20	240	
	XL7341G90A_ _	4' Cross Tee	48 x 15/16 x 1-11/16"	N/A	16.59	N/A	N/A	*	*	*	*	60	240	
	XL7321G90A_ _	2' Cross Tee	24 x 15/16 x 1-11/16"	N/A	74.38	N/A	N/A	*	*	*	*	60	120	
Molding	HD7801G90_ _	10' Hemmed Angle Molding (7/8")	120 x 7/8 x 7/8"	N/A	N/A	N/A	N/A	N/A	*	*	*	30	300	
Accessories	BACG90A	Wind Uplift Clip (2")	N/A	N/A	N/A	N/A	N/A	N/A	*	*	*	20	0	N/A
	UHDC	Universal Hold-down Clip	N/A	N/A	N/A	N/A	N/A	N/A	*	*	*	1,000	N/A	

* Simple Span
♦ Add 2-letter color suffix to item number when specifying or ordering. (ex. HD7801G90A **B L**)

Dots represent high level of performance.

ASTM Class
HD - Heavy-duty
ID - Intermediate-duty
LD - Light-duty

DETAILS



SUSPENSION SYSTEMS - Standard