



FAST 134
Select Items Ship Fast
armstrongceilings.com/fast134

SOUNDSCAPES® Blades

Linear Acoustical Wall Panels – Wood Looks
fine texture



SoundScapes Blades wood-look wall panels in Brown Sugar Walnut (WBS)

Linear acoustical wall panels help reduce reverberation time in your space.

KEY SELECTION ATTRIBUTES

- Now available in 4 Wood Looks
- Direct attach to wall using Axiom® Wall Molding
- Sound absorption up to 0.85 NRC dependent on blade spacing
- Black embedded hanging clips
- Custom panel options available
- Mold- and mildew-resistant surface
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at armstrongceilings.com/fast134
- Seismic-tested
- ASTM E84 Class A Fire Performance

FINISHES

Standard Wood-look Visuals



Brown Sugar Walnut (WBS) Toffee Chestnut (WTC) Vanilla Ash (WVA) Honey Oak (WHO)

NOTE: Coordinated Prelude® suspension systems available for Wood Looks



Nature-Inspired Colors Available!

SOUNDSCAPES® Blades

Linear Acoustical Wall Panels – Wood Looks
fine texture



LEED® WELL | LBC

53% RECYCLED CONTENT

For LEED contribution contact TechLine

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/biobased producer resp.
- biobased materials
- recycled content
- sourcing of low materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

VISUAL SELECTION Shown in elevation view

Item No. ♦	Description	Dimensions (D x L x Thickness)
SOUNDSCAPES® 8250F04RH05_ _ _	Rectangular Vertical Panel	5 × 46 × 1-3/4" 
8250F04RH06_ _ _	Rectangular Vertical Panel	5 × 94 × 1-3/4" 

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
 ♦ Add 3-letter finish suffix to end of item number (e.g., 8250F04RH05 W H Q = Honey Oak)

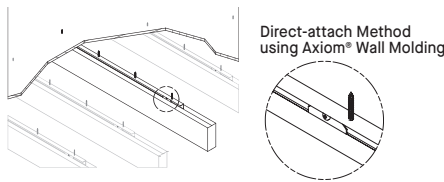
PERFORMANCE Dots represent high level of performance.

	Fire Rating	Anti-Mold/Mildew	Sag Resist	Fog	Spray
Class A	•	•	•	•	•
Class A	•	•	•	•	•

INSTALLATION OPTIONS

Item No. ♦	Description	Pieces/ Carton
Direct-Attach with Axiom® Wall Molding	AXM34STR3_ _	10' Straight Wall Molding (360° Paint Recommended; order by the piece)

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)



ACOUSTIC INFORMATION

Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.85	0.60	0.45	0.35

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

PHYSICAL DATA

Material
1-3/4" thick fiberglass with acoustically transparent membrane on face and sides.

Surface Finish
SoundScapes Blades panels are acoustically transparent membrane. Top of panel is unfinished with black embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with wood-look panels to avoid surface damage. Be advised thickness on wood-look blades is 1/4" less than painted blades.

5" SoundScapes Blades are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

All wood-look blades are produced with wood grain parallel to the panel length. Wood-look visuals are designed to mimic slight color variations as seen in real wood.

Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems
SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See installation instructions BPLA-297844 for installation details.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
8250F04RH05 – 2.9 LBS per panel
8250F04RH06 – 5.8 LBS per panel

Panels/Carton
4
Minimum Order Quantity
1 carton

