


TECTUM® DesignArt™ – Lines High NRC

Tegular
coarse texture




CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

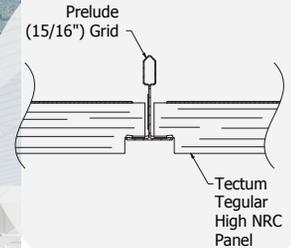

Visit our online pattern gallery at:
armstrongceilings.com/patterngallery

Mix and match Shapes and
Lines for a truly unique visual!

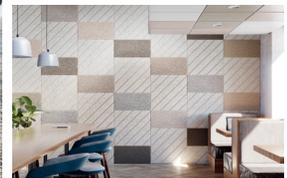

Tectum DesignArt – Lines High NRC Tegular ceiling Tilts panels in Mist (TMT) and Rainstorm (TRS) with coordinating Axiom® Classic Straight Perimeter Trim


armstrongceilings.com/designart

Transform interior spaces with a three-dimensional visual by combining texture, routed patterns, and colors with sustainable, acoustical Tectum® DesignArt™ – Lines High NRC Tegular Ceiling Panels

KEY SELECTION ATTRIBUTES

-  Tectum DesignArt – Lines Tegular High NRC panels is the first of its kind to have a proprietary factory-applied acoustical backer, adding sound absorption that is UL® certified
-  29 standard routed panels for 24" × 24" and 24" × 48" Tegular ceilings
- Available in 24 standard nature-inspired colors and Natural
- Precision routing of lines allows for seamless connections between compatible panel face designs
- Tectum DesignArt – Lines panels have UL-certified acoustics with testing and reporting that align with industry-wide best practices
- Color-coordinated suspension systems available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- Part of the Sustain® portfolio, and meeting the most stringent industry sustainability compliance standards today
- Touch up paint available for standard colors
- Mold- and mildew-resistant surface
- Durable for heavy-use interiors
- All edges are painted
- USDA Biobased content: 98%

DETAILS

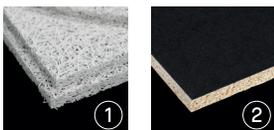

1. Tectum DesignArt – Lines High NRC Tegular panel. All edges are painted.
2. Tectum DesignArt – Lines High NRC Tegular panel with proprietary acoustical backer

TECTUM® DesignArt™ – Lines High NRC


Regular coarse texture



energy management	✓	recyclable/extended producer resp.	✓
construction waste mgmt	✓	biobased materials	✓
regional materials	✓	FSC® (for wood)	✓
design for flexibility	✓	recycled content	✓
EPD	✓	sourcing of raw materials	✓
		material ingredient reporting	✓
		low emitting materials	✓
		lighting quality	✓
		acoustics	✓

For LEED contribution contact TechLine

WELL Building Standard™ (WELL) Living Building Challenge® (LBC)

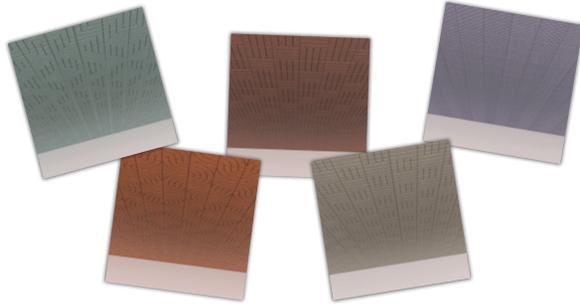

Visit our online pattern gallery at armstrongceilings.com/patterngallery
Use our recommended colors, or choose from 24 standard colors, in addition to Natural to create your own one-of-a-kind pattern!

COLORS Due to printing limitations, shade may vary from actual product.

Basalt (TBT)	Polar (TPO)	Sandstone (TSS)	Mist (TMT)	Lilac (TLC)	Boxwood (TBW)	Feldspar (TFS)	Honeysuckle (THS)	Natural (TNA)
Riverstone (TRV)	Limestone (TLM)	Hay (THY)	Pacific (TPC)	Twilight (TTT)	Fern (TFN)	Topaz (TTZ)	Marigold (TMG)	
Coffee (TCE)	Fossil (TFL)	Oat (TOT)	Rainstorm (TRS)	Ocean (TOC)	Ivy (TIV)	Bronzite (TBZ)	Rose (TRO)	Custom Colors Available*

* For custom options contact ASQuote, ASQuote@armstrongceilings.com
Custom color panels and any panels greater than 1" thick are not included in Sustain® portfolio.

VISUAL SELECTION

Item No.	Dimensions W x L x H (Inches)
TECTUM® DesignArt™ – Lines High NRC	24 × 24 × 1" <input type="checkbox"/>
15/16" Square Regular	24 × 48 × 1" <input type="checkbox"/>

See next page

PERFORMANCE Dots represent high level of performance.

Fire Rating	Bio-Block	Humi-Guard+	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY	30-Yr Warranty
Class A	•	•	•	•	•	•	•	•

ACOUSTICAL INFORMATION

Panel Thickness	Infill Panel Item No.	NRC	CAC
1"	N/A	0.85	N/A




TECTUM® DesignArt™ – Lines

High NRC

Regular
coarse texture


FACE PROFILES




Currents
6348D11T10




Rings
6348D04T10




Arcs
6348D03T10




Bands
6348D08T10




Steps
6348D07T10




Illusions
6348D09T10

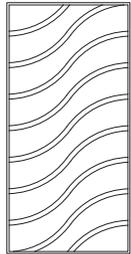


Currents B
6348D49T10

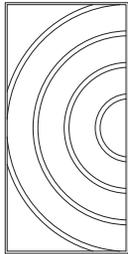


Rings B
6348D45T10

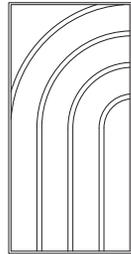


Retro
6348D43T10

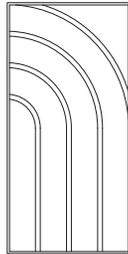


Retro B
6348D44T10

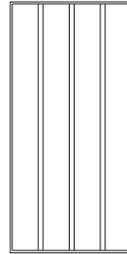


Bands B
6348D46T10

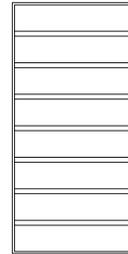


Bands C
6348D47T10

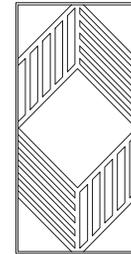


Illusions B
6348D48T10




Droplets
6348D13T10




Tilts
6348D15T10




Decos
6348D10T10




Signals
6348D14T10




Strings
6348D12T10

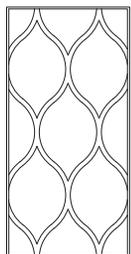


Droplets B
6348D51T10

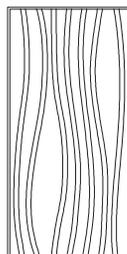


Contours
6348D53T10

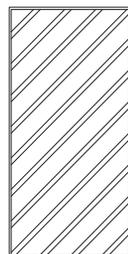


Tilts B
6348D40T10

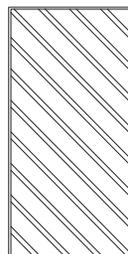


Tilts C
6348D41T10

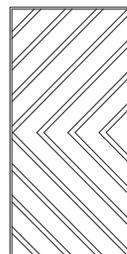


Tilts D
6348D42T10

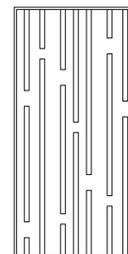


Signals B
6348D52T10

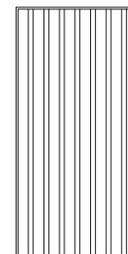


Strings B
6348D50T10




Hatches
6348D01T10




Checkers
6348D06T10



Rays
6348D05T10

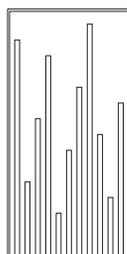

Levels
6348D54T10

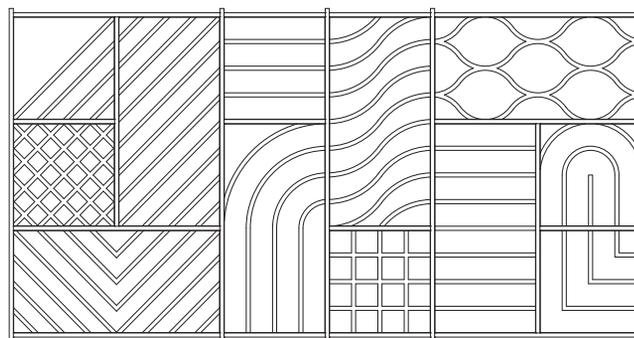

Precision Routing Allows for Mixing and Matching

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 6348D54T10 I P Q).

TechLine 877 276-7876

armstrongceilings.com/designart

Armstrong®
World Industries



TECTUM® WOOD FIBER – Standard

TECTUM® DesignArt™ – Lines High NRC


Tegular
coarse texture

SYSTEM INSTALLATION DETAILS


	Item No. ◆	Description	Quantity
Suspension Systems	7301 _ _ _	Prelude® XL® 15/16" 12' HD Main Beam	20 PCS/CTN
	7300 _ _ _ †	Prelude XL 15/16" 12' ID Main Beam	20 PCS/CTN
	XL7342 _ _ _ †	Prelude 4' Cross Tee	60 PCS/CTN
	XL7328 _ _ _ †	Prelude 2' Cross Tee	60 PCS/CTN
Wall-to-Wall	7800 _ _ _ †	12' Hemmed Angle Molding	30 PCS/CTN
Floating Cloud Installations	AX__STR____	Axiom Classic Straight Perimeter Trim	Per piece
Other Accessories	5456GAL1 _ _ _	Touch up paint††	1 gallon
	8178T10	Tectum® Hold-down Clip†††	200 PCS/CTN

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5456GAL1 T P Q). Consult installation instructions for fastener guidance.
 † 15/16" Prelude XL Suspension System available in coordinating colors to Tectum DesignArt. For the appropriate 3-digit color suffix, please visit armstrongceilings.com/suspensionssystems
 †† Touch up paint is available to paint screw heads in field if desired or specified.
 ††† Tectum hold-down clip should be used in high impact spaces (such as gymnasiums) and will limit accessibility. One clip is required for each 2' x 2' panel and 2 clips are required for each 2' x 4' panel.


SYSTEM INSTALLATION DETAILS

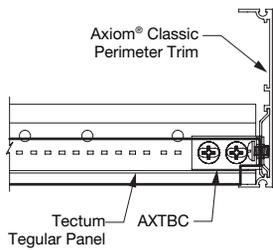

1 Discontinuous system using Axiom® trim solutions

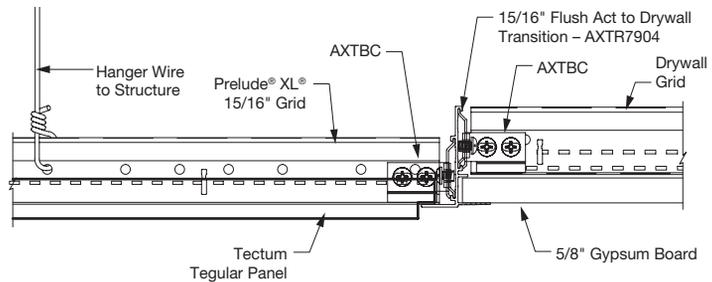

2 Transitions with Axiom

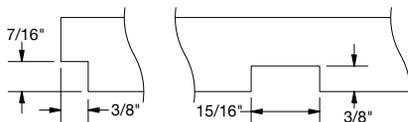

3 Routing for Lines with Tegular Edge

PHYSICAL DATA

Material

Cementitious Wood Fiber; FSC® certified. For more information about FSC-certified fire-retardant products, or to view our FSC certification letter, contact TechLine at 1 877 276 7876. Tectum® DesignArt™ – Lines High NRC panels has an acoustical fleece

Surface Finish

Factory-applied latex paint on abuse-resistant silicate surface coating. Natural finish is unpainted, but after the coating is applied, panels may appear light in color.

Panels are painted on the edge, however due to fibrous texture of panels, certain angles and lighting conditions will make edge appear less or more painted.

Can be field painted up to 6 times without impacting acoustic or fire performance. See installation instructions for details on paint and application method.

Fire Performance

Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less (painted, face only).

Humidity/Sag Resistance

HumiGuard® Plus panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew

Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy

See all LCA information on our EPDs.

Design Considerations

Color variation among panels is common due to the natural characteristics of the wood on White and Natural panels.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute™; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; Revit® is a registered trademark of Autodesk, Inc.; UL and UL Certified are registered trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2024 AWI Licensing LLC

Installation Considerations

Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum panels. Refer to installation instructions for complete details and cutting recommendations.

Specification Consideration

FSC-certified panels available upon request.

Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint

Tectum Tegular panels are approved for application in all seismic areas when installed per Armstrong Ceilings Installation Instructions.

Cleaning and Disinfecting

Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

Warranty

30-Year Performance Guarantee & Warranty when installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton

1" – 1.65 LBS/SF

Panels sold by the carton (8 PCS/CTN). Other accessories and suspension elements quantities noted above.

