


WOODWORKS® Access™

Flat & Curved Ceiling Systems

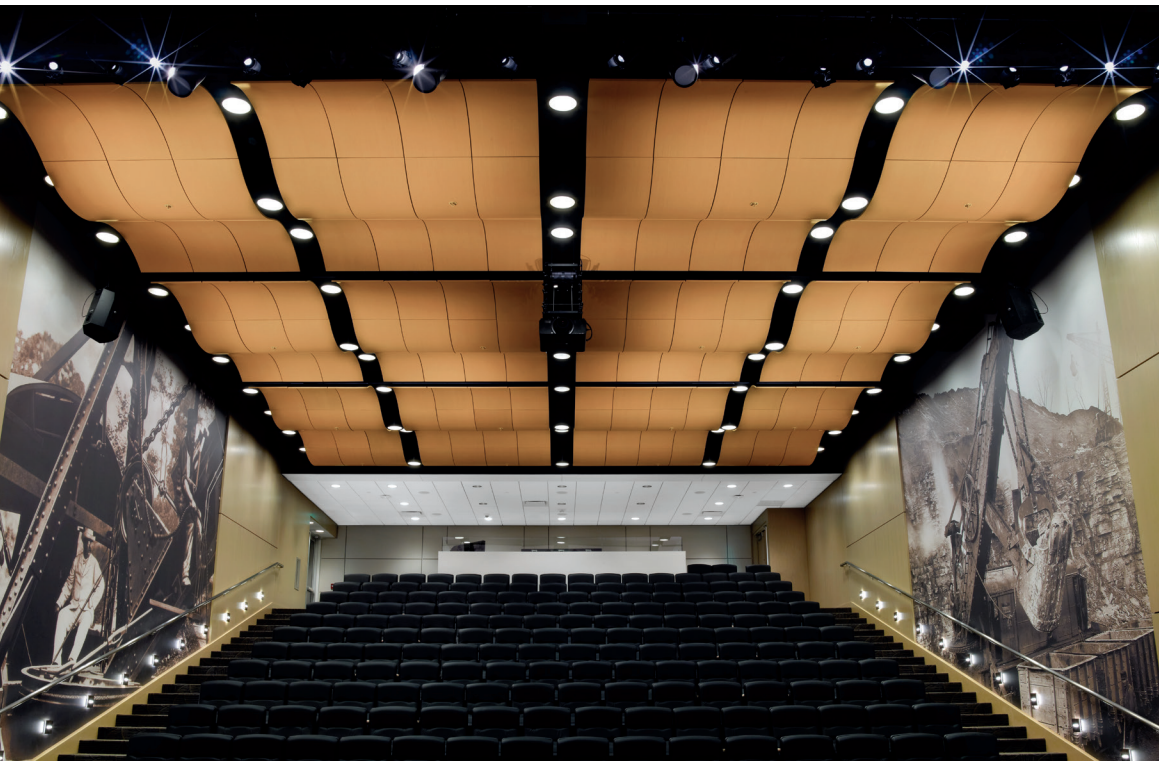

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

plus capabilities
 to do more



WoodWorks Access Custom Curved Ceiling System in Quartered Maple

armstrongceilings.com/capabilities
 See more photos at:
armstrongceilings.com/photogallery

WoodWorks® Access™ ceiling system is a completely accessible installation system for flat, radial, and curved applications as well as standard 24" x 24" products.

KEY SELECTION ATTRIBUTES

- Provides full downward accessibility
- Panel options up to 16 square feet
- Flat, radial, and curved panels available
- Acoustical options with perforated panels
- Meets requirements for seismic areas

TYPICAL APPLICATIONS


- Office
- Higher education
- Healthcare
- Boardroom and other high-profile spaces
- Concert halls and museums
- Public spaces requiring sound absorption and reflective surfaces

VENEERS Due to printing limitations, shade may vary from actual product.


Natural Variations™
 (Real Wood Veneers)



Constants™
 (Real Wood Veneers)

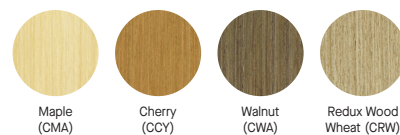

PERFORATION OPTIONS (Actual 1:6 scale shown)

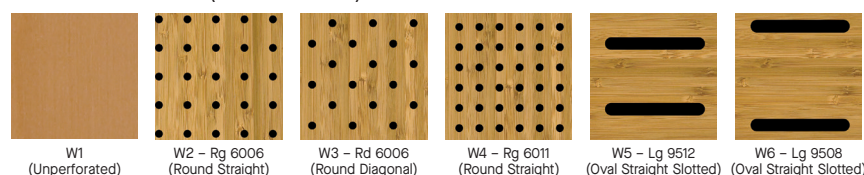

TechLine 877 276-7876
armstrongceilings.com/woodworks

NOTE: Slotted perforations run parallel to the length of the panel and borders vary with panel size.

Armstrong®
 World Industries

WOODWORKS® Access™

Flat & Curved Ceiling Systems

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 100%



LEED® WELL™ LBC

82% RECYCLED CONTENT

For LEED contribution contact TechLine


| | | | | | | | | | | | | | |
|-------------------|--------------------------|--------------------|------------------------|-----|------------------------------------|--------------------|-----------------|------------------|---------------------------|-------------------------------|------------------------|------------------|-----------|
| energy management | construction waste mgmt. | regional materials | design for flexibility | EPD | recyclable/extended producer resp. | biobased materials | FSC® (for wood) | recycled content | sourcing of low materials | material ingredient reporting | low emitting materials | lighting quality | acoustics |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

LOCATION DEPENDENT


WITH INFILL PANEL

INSTALLATION DETAILS

WoodWorks® Integral Upturns

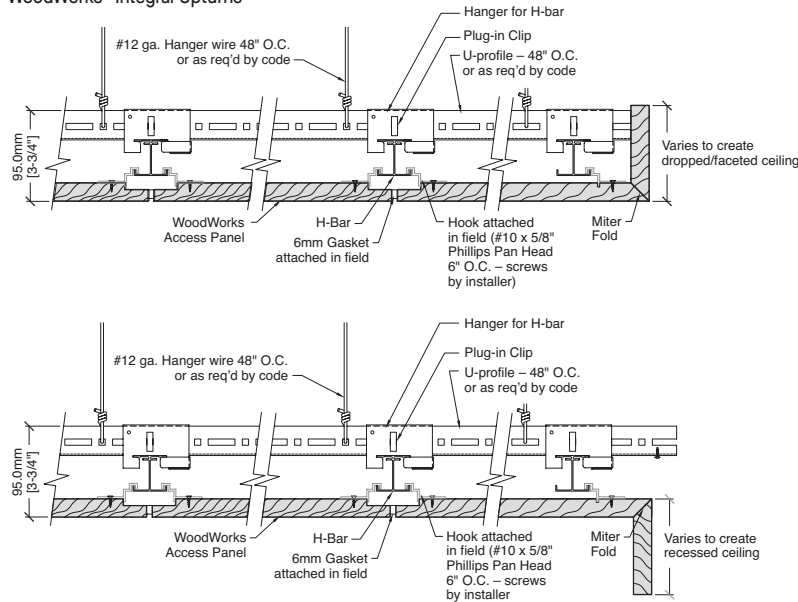

Curved Section with Curved U-Profile

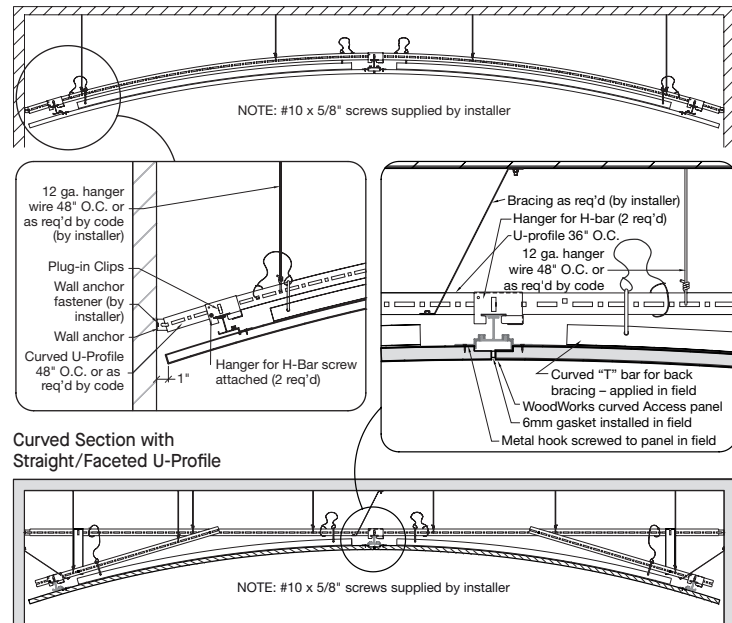

PHYSICAL DATA

Material
Fire-retardant particle board with face-cut veneers;
FSC®-certified fire-retardant particle board with face-cut veneers.

Surface Finish
Clear or tinted semigloss coating

Fire Performance
Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.
CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
Composite – Fire Class A

Primary (Embodied) Energy
See all LCA information on our EPDs.

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.
It is very important that WoodWorks panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Specification Consideration
Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
WoodWorks Access panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Warranty
Details at armstrongceilings.com

Weight; Square Feet
Panels – 2.75 LBS/SF

TechLine / 1 877 276-7876
armstrongceilings.com/woodworks
BPCS-3574-124

Revit® is a registered trademark of Autodesk, Inc. LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute™; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2024 AWI Licensing LLC

Armstrong®
World Industries

ACOUSTICAL INFORMATION

| Perforation | Item No. | NRC |
|-----------------------------|---|--|
| W1 Unperforated | N/A | |
| W2 Round Straight | 8200T10 1713BL 2820BK 5823 5479 1318 | 0.45 0.55 0.55 0.40 0.40 0.55 |
| W3 Round Diagonal | 8200T10 1713BL 2820BK 5823 5479 1318 | 0.45 0.55 0.55 0.40 0.40 0.55 |
| W4 Round Straight | 8200T10 1713BL 2820BK 5823 5479 1318 | 0.60 0.60 0.65 0.65 0.65 0.60 |
| W5 Oval Straight Slotted | 8200T10 1713BL 2820BK 5823 5479 1318 | 0.50 0.50 0.55 0.45 0.45 0.55 |
| W6 Oval Straight Slotted | 8200T10 1713BL 2820BK 5823 5479 1318 | 0.40 0.35 0.35 0.45 0.45 0.35 |



WOODWORKS® – Custom