


WOODWORKS® Channeled Planks



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

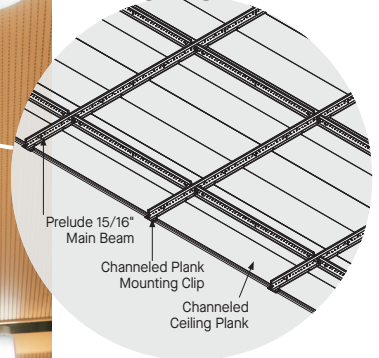

plus capabilities
 to do more



WoodWorks Channeled plank with W9 perforation in Natural Variations Maple

armstrongceilings.com/capabilities
 See more photos at:
armstrongceilings.com/photogallery

These FSC® certified ceiling panels are available in rich, real wood veneers.

KEY SELECTION ATTRIBUTES

- Create a continuous ceiling or cloud
- Create a ceiling-to-wall transition
- Real wood veneers
- Standard acoustical fleece improves sound absorption
- Shorter lead times and lower costs than custom millwork
- Class A fire performance
- FSC® Chain of Custody (CoC) certified WoodWorks® products represent responsible production and consumption practices from the forest to the consumer
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits

VENEERS Due to printing limitations, shade may vary from actual product.

Natural Variations™ (Real Wood Veneers)



Maple (NMP)



Light Cherry (NLC)



Dark Cherry (NDC)



Custom Veneers and Finishes Available (extended lead times)

VENEER PERFORATION OPTIONS (Actual 1:2 scale shown)



W7 (13mm profile with 3mm groove)



W8 (5mm profile with 3mm groove)



W9 (25mm profile with 3mm groove)

WOODWORKS® Channeled Planks



LEED WELL LBC UP TO 69% RECYCLED CONTENT

For LEED contribution contact TechLine

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- FSC® (for wood)
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

WITH INFILL PANEL

VISUAL SELECTION

Edge Profile	Item No. ♦	Dimensions Nominal W x L x H (Inches) Custom Sizes Available	Perforations
	5900C	5.553 x 96 x 3/4"	W7, W8, W9*
	5901C	5.553 x 120 x 3/4"	W7, W8, W9*

♦ When specifying or ordering, include the appropriate 5-letter perforation and color suffix (e.g., 5900CW Z N M P.)
 * Size width for panels with W9 perforation is 5.393".

PERFORMANCE

Fire Rating
Class A
Class A

ACOUSTICAL INFORMATION

Performance determined by perforation size. Dots represent high level of performance.

Perforation	Infill Panel Item No.	NRC
	Panel only	0.70
	8200T10	0.80
	1713BL	0.75
	2820BK	0.80
	5823	0.80
	Panel only	0.70
	8200T10	0.80
	1713BL	0.70
	2820BK	0.80
	5823	0.85
	Panel only	0.60
	8200T10	0.65
	1713BL	0.60
	2820BK	0.60
	5823	0.65

CEILING PLANK CLIPS

Item Number	Description	Dimensions	Color	PCS/CTN
5389	Channeled Panel Clip	N/A	N/A	250

SUSPENSION SYSTEMS


(Heavy-duty)
 15/16"

 Prelude® XL® HD (Black recommended)

ACCESSORIES

Trim and infill panels are available. For more information go to: armstrongceilings.com/woodworksaccessories

INSTALLATION DETAILS

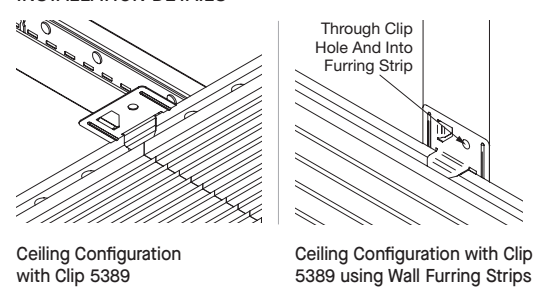

PHYSICAL DATA

Material
 FSC-certified fire-retardant medium-density fiberboard with face-cut veneers.

Surface Finish
 Clear or tinted semi-gloss coating

Fire Performance
 Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
 Type XX - Fire Class A

Application Considerations
 Variation among panels may occur due to the natural characteristics of the wood and grain.

It is very important that WoodWorks panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Specification Consideration
 Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
 WoodWorks Channeled wood planks have been engineered, tested, and approved in all seismic areas when installed per Armstrong Ceilings installation instructions.

Cleaning and Disinfecting
 Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
 Details at armstrongceilings.com/warranty

Panel Weight
 2.2 LBS/SF (Bulk packaged)