



Fine Fissured™ textured panels offer economical high performance and are available in 24-in x 24-in square and tegular styles, and a 24-in x 48-in square style.


FEATURES & BENEFITS

- Great for new, replacement and matching ceilings in basements, schools, offices and light commercial spaces
- Acoustical; reduce noise 55%
- Superior sag and mold resistance
- Installs in Prelude® 15/16-in suspension system
- 922, 928, and 932 panels are disinfectable; see ceilings.com/cleanmyceiling for details

OPTIONS




922 FINE FISSURED™

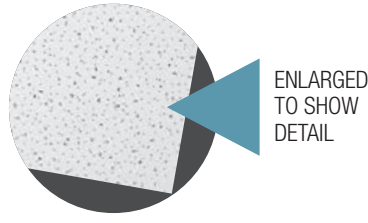


ENLARGED
TO SHOW
DETAIL



928 FINE FISSURED™
932 FINE FISSURED



1728BL FINE FISSURED™
BLACK



PERFORMANCE AND INSTALLATION GUIDE

Item #	Dimensions (Inches)	Edge Detail	Installation Method	Fire Resistance	Sag Resistance	Mold/ Mildew Resistance	Disinfect by Fogging	Noise Reducing		Light Reflectance	Recycled Material Content
								NRC	CAC		
922	24 x 48 x 5/8	Square	Prelude® 15/16-in Grid	Class A	Superior	Superior	✓	0.55	35	0.82	40%
928	24 x 24 x 5/8	Square	Prelude® 15/16-in Grid	Class A	Superior	Superior	✓	0.55	33	0.82	40%
932	24 x 24 x 5/8	Tegular	Prelude® 15/16-in Grid	Class A	Superior	Superior	✓	0.55	35	0.82	40%
1728BL*	24 x 24 x 5/8	Square	Prelude® 15/16-in Grid	Class A	Superior	Superior		0.55	33	0.06	40%

PACKAGING GUIDE

Item #	Dimensions (Inches)	SF Per Ctn	Pcs/Ctn	Lbs/Ctn	Ctns Per Pallet	Layers Per Pallet	Warranty
922	24 x 48 x 5/8	64	8	45	36	14	10/30-Year
928	24 x 24 x 5/8	64	16	45	36	9	10/30-Year
932	24 x 24 x 5/8	64	16	53	36	9	10/30-Year
1728BL*	24 x 24 x 5/8	64	16	52	36	9	10/30-Year

*Coordinating 64 sq. ft. black grid kits (6362BL) are available.

TECHLINE: 1 877 ARMSTRONG (276-7876)
techline@armstrongceilings.com

ceilings.com