




973 LUMAWASH®

Lumawash® ceiling panels offer a smooth bright white finish and meet USDA/FSIS guidelines for use in food prep areas. Panels are available in 24-in x 24-in and 24-in x 48-in square styles.



FEATURES & BENEFITS

- Appropriate for kitchens, light commercial spaces, and basements
- Superior sag and mold resistance
- Reflects 89% of light that strikes its surface
- Installs in Prelude® 15/16-in suspension system
- Panels are disinfectable; see ceilings.com/cleanmyceiling for details

OPTIONS



972 LUMAWASH®

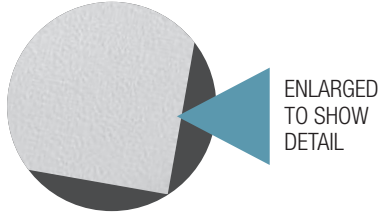

ENLARGED TO SHOW DETAIL

973 LUMAWASH®

PERFORMANCE AND INSTALLATION GUIDE

Item #	Dimensions (Inches)	Edge Detail	Installation Method	Fire Resistance	Sag Resistance	Mold/Mildew Resistance	Disinfectability			Noise Reducing		Light Reflectance	Recycled Material Content
							Fog	Spray	Wipe	NRC	CAC		
972	24 x 48 x 5/8	Square	Prelude® 15/16-in Grid	Class A	Superior	Superior	✓	✓	✓	-	33	0.89	36%
973	24 x 24 x 5/8	Square	Prelude® 15/16-in Grid	Class A	Superior	Superior	✓	✓	✓	-	33	0.89	36%

PACKAGING GUIDE

Item #	Dimensions (Inches)	SF Per Ctn	Pcs/Ctn	Lbs/Ctn	Ctns Per Pallet	Layers Per Pallet	Warranty
972	24 x 48 x 5/8	64	8	45	36	18	10/30-Year
973	24 x 24 x 5/8	64	16	44	36	9	10/30-Year

TECHLINE: 1 877 ARMSTRONG (276-7876)
techline@armstrongceilings.com

ceilings.com