


Sonoflex™ Random Fissured™ Fiberglass ceiling panels offer a combination of high performance and visual interest. Panels are available in a 24-in x 48-in square style.

## FEATURES & BENEFITS

- Ideal for basements and light commercial spaces
- Acoustical; reduce noise 55%
- Superior sag and mold resistance
- Lightweight, easy to handle alternative to traditional mineral fiber ceiling options
- Installs in Prelude® 15/16-in suspension system

# SONOFLEX™ RANDOM FISSURED™ FIBERGLASS

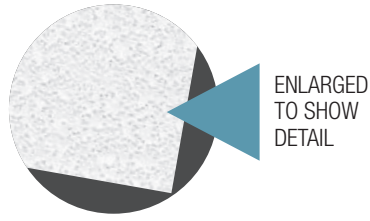


## OPTIONS



ENLARGED  
TO SHOW  
DETAIL

410 SONOFLEX™ RANDOM FISSURED™ FIBERGLASS

## PERFORMANCE AND INSTALLATION GUIDE

Item #	Dimensions (Inches)	Edge Detail	Installation Method	Fire Resistance	Sag Resistance	Mold/ Mildew Resistance	Noise Reducing		Light Reflectance	Recycled Material Content
							NRC	CAC		
410	24 x 48 x 5/8	 Square	Prelude® 15/16-in Grid)	Class A	Superior	Superior	0.55	-	0.72	82%

## PACKAGING GUIDE

Item #	Dimensions (Inches)	SF Per Ctn	Pcs/Ctn	Lbs/Ctn	Ctns Per Pallet	Layers Per Pallet	Warranty
410	24 x 48 x 5/8	128	16	22	18	13	10/30-Year

TECHLINE: 1 877 ARMSTRONG (276-7876)  
techline@armstrongceilings.com

[ceilings.com](http://ceilings.com)